

Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

SITRANS FUS060 transmitter

Overview



SITRANS FUS060 is a transit time based transmitter designed for ultrasonic flowmetering with dedicated sensors in the FUS inline series up to DN 500. SITRANS FUS060 is engineered for high performance and is suitable for 1- and 2-path flowmeters.

Benefits

- Superior signal resolution for optimum turn down ratio
- Simple menu-based local operation with two-line display and four optical input elements, for unlimited use in potentially explosive atmospheres
- Self-monitoring and diagnostic
- Operate up to 2 paths
- ATEX II G Ex dem [ia/ib] IIC T6/T4/T3 Gb
- Remote installation up to 120 m from sensor
- 1 analog output (4 to 20 mA) standard with HART-protocol, 1 digital frequency or pulse output, 1 relay output for limit, alarms, flow direction
- PROFIBUS PA Profile 2, 1 digital frequency or pulse output

Application

The main application for flowmeters with the transmitter SITRANS FUS060 is measurement volume of water and waste water.

Design

The transmitter type FUS060 is designed for remote installation in non-hazardous or hazardous areas.

The transmitter is designed for use in a flowmeter system together with sensors type SONOKIT, SONO 3300 and SONO 3100.


The FUS060 is ordered as part of a complete flowmeter system. It can be ordered separately as spare part and manually programmed with the sensor data.

Function


Displays and keypad

Operation of the SITRANS FUS060 transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS PA communication

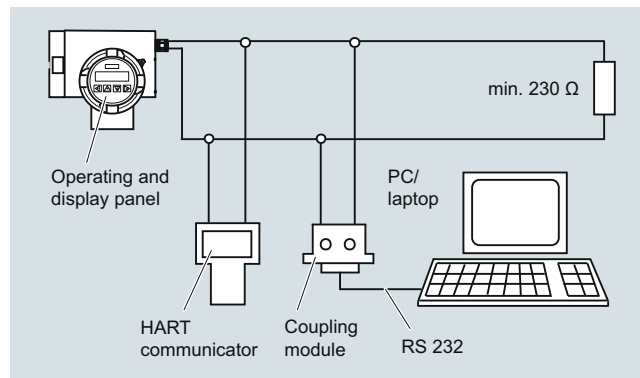


HART communication

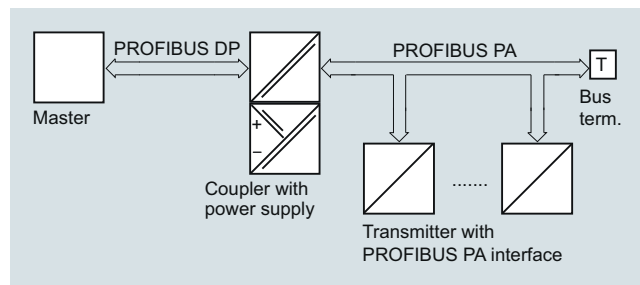

PROFIBUS PA communication

The operating and display panel permits simple operation without supplementary equipment. It is not necessary to open the housing. All changes to a setting can therefore also be carried out in the potentially explosive atmosphere.

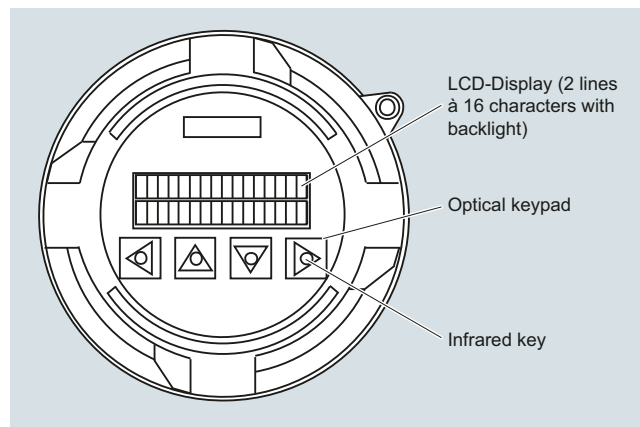

Operating and display panel

Function (continued)

The individual functions and parameters are selected using a hierarchical, multi-language input menu and four infrared keys. The parameters can be specifically selected and modified using codes, e.g.:

- Operating parameters such as measuring range, physical dimensions, device information
- Limits for flow, totalizer, ultrasonic velocity or ultrasonic amplitude
- Noise suppression using damping, error stages and hysteresis
- Display parameters (freely-configurable display)
- Display in volume or mass dimensions
- Density as constant input value for conversion of volume into mass dimensions
- Forward/backward measurement
- Flow direction
- Diagnostics functions and control values
- Functions of the PROFIBUS PA output:
flow, net quantity (volume or mass), ultrasonic velocity, ultrasonic amplitude, forward quantity (volume or mass), backward quantity (volume or mass)
- Functions of the analog output:
flow, ultrasonic velocity or ultrasonic amplitude
- Functions of digital output 1:
pulse output, frequency output, limit, flow direction or device status
- Functions of digital output 2:
limit, flow direction or device status
- Simulation of output signal via analog output, digital output 1 and digital output 2

The HART protocol is implemented via the analog output (current output). Using this communication facility, the device can be parameterized with a PC/laptop and SIMATIC PDM software in addition to local operation.

In the version with PROFIBUS PA, the analog output is replaced by the digital PROFIBUS PA output. The device can then be parameterized via PROFIBUS communication and with SIMATIC PDM in addition to local operation.

Integration

The transmitter output is often used as input for an automation system or as input for systems of remote reading.

The SITRANS FUS060 transmitter offers current, pulse and relay outputs as standard output functions and supports HART or Profibus PA communication.

The settings of the transmitter output functions are individually programmed via keypad and display menu.

Flow Measurement

SITRANS FS (ultrasonic)

Inline ultrasonic flowmeters

SITRANS FUS060 transmitter

Technical specifications

Input

Measurement	Flow by measuring the transit time difference of ultrasonic signals through ultrasonic transducers in DN 100 ... 500 (4 ... 20") 2-path sensor pipes: 1-path or 2-path
Nominal sizes and number of paths	2-path DN 100 ... 500 (4 ... 20")
Max. cable length	20 m (395 ft) (shielded coaxial cable). For Ex version the transducer cable length is restricted to 3 m (9.84 ft) in order to meet requirements for electrical immunity.

Analog output

Function	Current output programmable for flow, sound velocity or amplitude level. Active current output (13.2 V < open loop voltage < 15.8 V)
• Signal range	4 ... 20 mA
• Upper limit	20 ... 22.5 mA, adjustable
• Signal on alarm	3.6 mA, 22 mA, or 24 mA
• Load	Max. 600 Ω; for non Ex version ≤ 230 Ω for HART communication ≤ 330 Ω for Ex-version
• Only PROFIBUS PA version:	Analog output omitted, is replaced by digital PROFIBUS PA interface

Digital output 1

Function	Pulse, frequency or status output - programmable for pulses, frequency, alarm, limit or status.
• Active or passive signal, can be configured with positive or negative logic	Active: 24 V DC, ≤ 24 mA, R _i = 300 Ω Passive: open collector, 30 V DC, ≤ 200 mA
• For explosion protection (ATEX version) and PROFIBUS PA version	Only passive: open collector 30 V DC, ≤ 100 mA
• Output function, configurable	Pulse output <ul style="list-style-type: none"> Adjustable pulse significance ≤ 5 000 pulses/s Adjustable pulse width ≥ 0.1 ms Frequency response <ul style="list-style-type: none"> f_{END} selectable up to 10 kHz Limit for flow, totalizers, ultrasonic velocity or ultrasonic amplitude device status, flow direction

Digital output 2

Function	Relay output - programmable for alarm, limit or status indication.
• Relay, NC or NO contact	Switching capacity max. 5 W Max. 50 V DC, max. 200 mA DC Self-resetting fuse, R _i = 9 Ω
• For explosion protection (ATEX version)	Max. 30 V DC, max. 100 mA DC, 50 mA AC (cf. EC-Type Examination certificate)
• Output function, configurable	Limit for flow, ultrasonic velocity or ultrasonic amplitude flow direction device status
• Only PROFIBUS PA version:	Digital output 2 omitted

Communication via analog output 4 ... 20 mA

• PC/laptop or HART communicator with SITRANS F flowmeter	
- Load with connection of coupling module	min. 230 Ω (max. 330 Ω for Ex-version)
- Load with connection of HART communicator	min. 230 Ω
- Cable	2-wire shielded ≤ 3 km (≤ 1.86 miles) Multi-core shielded ≤ 1.5 km (≤ 0.93 miles)
- Protocol	HART, version 5.1

Communication via PROFIBUS PA interface

• Power supply	Layers 1 + 2 according to PROFIBUS PA Communication system according to IEC 61158/EN 50170
• Current consumption from bus	Separate supply, four-wire device Permissible bus voltage 9 ... 32 V See certificates and approvals
	10 mA; ≤ 15 mA in event of error with electronic current limiting

Electrical isolation

Outputs electrically isolated from power supply and from another

Accuracy

Error in measurement (at reference conditions)	
• Pulse output	≤ ± 0,5 % of measured value at 0,5 ... 10 m/s or ≤ ± 0,25/V[m/s]% of measured value at flow < 0,5 m/s
• Analog output 4 ... 20 mA	As pulse output plus ± 0.1 % of measured value, ± 20 μA
• Repeatability	≤ ± 0,25 % of measured value at 0,5 ... 10 m/s
Reference conditions (water)	
• Process temperature in the connected sensor	25 °C ± 5 °C (77 °F ± 9 °F)
• Ambient temperature at the transmitter	25 °C ± 5 °C (77 °F ± 9 °F)
• Transmitter warming-up time	30 min.

Technical specifications (continued)

Rated operation conditions

Ambient conditions

Ambient temperature

- Operation -20 ... +50 °C (-4 ... +122 °F)
 - In potentially explosive atmospheres Observe temperature classes
 - Storage -25 ... +80 °C (-13 ... +176 °F)
- Enclosure rating IP65 (NEMA 4)
- Electromagnetic compatibility For use in industrial environments
- Emitted interference To EN 55011 / CISPR-11
 - Noise immunity To EN/IEC 61326-1 (Industry)

Medium conditions

The measuring media must be ultrasonic signal compatible. It must be homogeneous and not two-phased to transfer the acoustic ultrasonic signals.

- Process temperature -200 ... +250 °C (-328 ... +482 °F) (not directly influenced by medium temperature)
- Gases/solids Influence accuracy of measurement (approx. max. 3 % gases or solids)

Design

- Separate version Transmitter is connected to the transducers via 3 ... 120 m (9.8 ft ... 395 ft) long specially shielded cables (coaxial cable)
- For ATEX versions mounted in the Ex area only with 3 m (9.8 ft) long cables.
- Enclosure material Die-cast aluminium, painted
- Wall mounting bracket (standard and special) Stainless steel (standard: always incl.)
- Weight of transmitter 4.4 kg (9.7 lb)
- Electrical connection Cable glands (always incl.)
- Power supply and outputs
 - 2 x M20 (HART)/M25 (PROFIBUS) or
 - 2 x ½"-NPT (HART)
 - Transducers/sensor
 - 2/4 x M16 or
 - 2/4 x ½"-NPT

Display and controls

- Display LCD, two lines with 16 characters each
- Multi-display: 2 freely-selectable values are displayed simultaneously in two lines
- Operation 4 infrared keys, hierarchical menu shown with codes

Power supply

- Supply voltage
- Standard version 120 ... 230 V AC ± 15 % (50/60 Hz) or 19 ... 30 V DC/21 ... 26 V AC
 - Ex version 19 ... 30 V DC/21 ... 26 V AC
- Power failure No effect for at least 1 period (> 20 ms)
- Power consumption Approx. 10 VA/10 W

Certificates and approvals

- Explosion protection ATEX II 2
G Ex dem [ia/ib] IIC T6/T4/T3 Gb
- T6 for media < 85 °C (185 °F)
T5 for media < 100 °C (212 °F)
T4 for media < 135 °C (275 °F)
T3 for media < 200 °C (392 °F)

Coaxial cable

Standard Coaxial cable (75 Ω)

- Coaxial cable with SMB straight plug on one end for connection to the FUS060
- Pre-terminated, can be shortened on sensor side
- Outside diameter Ø 5.8 mm
- Length 3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter
- Material (outside jacket) black PE
- Ambient temperature -10 ... +70 °C (14 ... 158 °F)



High temperature Coaxial cable (75 Ω)

- Coaxial cable with SMB straight plug on one end for connection to the FUS060
- Outside diameter Ø 5.13 mm (first 0.3 m (0.98 ft) part to the transducer), Ø 5.8 mm (for remaining cable to the transmitter – with SMB plug at the end) and between these is a black hot melt junction Ø 16 mm (length 70 mm)
- Fix terminated, can NOT be shortened
- Length 3, 15, 30 m (9.84, 49.21, 98.43 t) between sensor and transmitter (max. 3 m (9.84 ft)) transducer cable length for Ex area mounted transmitters)
- Material (outside jacket) Brown PTFE (0.3 m (0.98 ft) part) and black PE (for remaining cable)
- Ambient temperature -200 ... +200 °C (-328 ... +392 °F) (brown PTFE transducer part) and -10 ... +70 °C (14 ... 158 °F) (black PE for remaining transmitter cable part)


Flow Measurement

SITRANS FS (ultrasonic)


Inline ultrasonic flowmeters

SITRANS FUS060 transmitter

Dimensional drawings

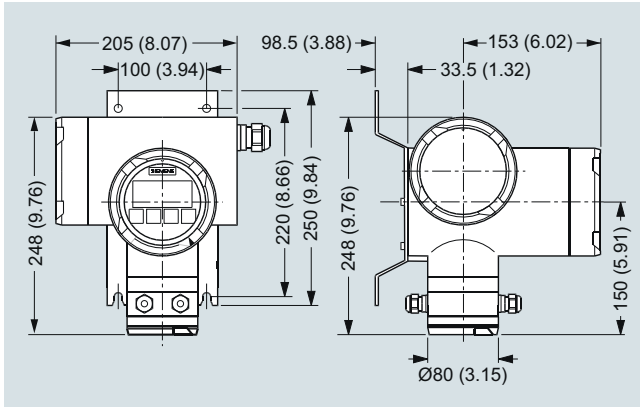


SITRANS FUS060 with standard mounting bracket, dimensions in mm (inch)

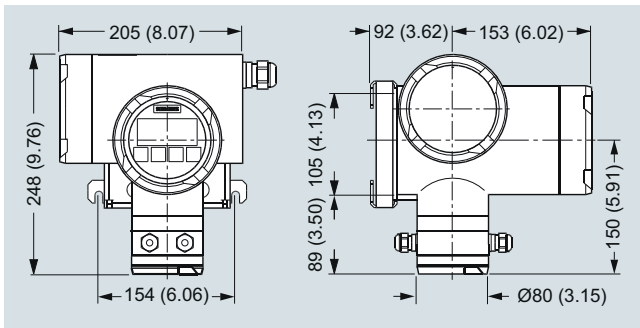

SITRANS FUS060 with optional special mounting bracket, dimensions in mm (inch)

Circuit diagrams

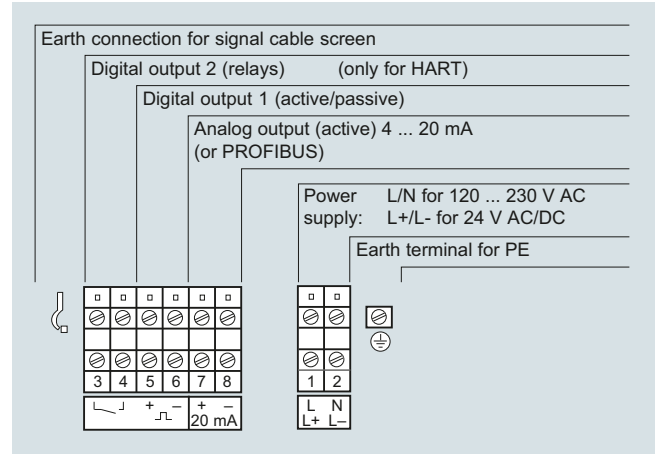

Electrical connection SITRANS FUS060