

#### Overview



Pointek CLS100 is a compact, 2-wire, inverse frequency shift capacitance switch for level and material detection in constricted spaces, interfaces, solids, liquids, slurries, and foam; with the ability to tune out buildup on probe.

#### Benefits

- Easy installation with verification by built-in LED
- Low maintenance with no moving parts
- Sensitivity adjustment
- Integrated cable or PBT enclosure versions available
- Intrinsically Safe, Dust Ignition Proof, and General Purpose options available

#### Application

Pointek CLS100's short insertion length of 100 mm (4 inch) and versatility in various applications and in vessels or pipes makes it a good replacement for traditional capacitance sensors.

Its advanced tip-sensing technology provides accurate, repeatable switchpoint performance. The PPS (Polyphenylene sulfide) probe [optional PVDF (Polyvinylidene Fluoride)] is chemically resistant with an effective process operating temperature range from -30 to +100 °C (-22 to +212 °F) (7ML5501), and -10 to +100 °C (14 to 212 °F) (7ML5610). The fully potted design ensures reliability in a vibrating environment such as agitated tanks up to 4 g. When used with a SensGuard protection cover, the CLS100 is protected from shearing, impact, and abrasion in tough primary processes.


The Pointek CLS100 is available in three versions. The integral cable version has a stainless steel process connection and probe options of PPS or PVDF. The fully synthetic version has a thermoplastic polyester enclosure with a PPS process connection combined with a PPS probe. The standard enclosure version has a thermoplastic polyester enclosure with a stainless steel process connection in combination with a PPS or PVDF probe.

- Key Applications: liquids, slurries, powders, granules, food and pharmaceuticals, chemicals, hazardous areas


#### Configuration

##### Installation

##### Standpipes

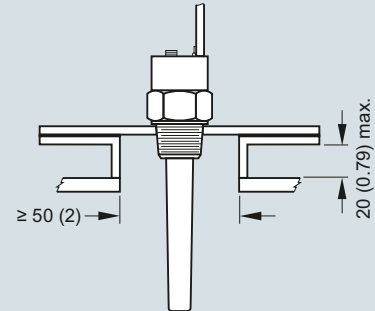

##### Wall restriction

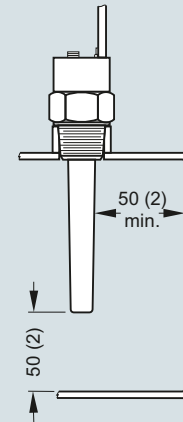

Pointek CLS100 installation, dimensions in mm (inch)

## Level measurement

Point level measurement

RF Capacitance switches

### Pointek CLS100

#### Technical specifications

	Stainless steel process connection (integral cable or enclosure version) (7ML5501)	Fully synthetic process connection (enclosure version only) (7ML5610)
<b>Mode of operation</b>		
Measuring principle	Inverse frequency shift capacitive level detection	Inverse frequency shift capacitive level detection
<b>Input</b>		
Measured variable	Change in picoFarad (pF)	Change in picoFarad (pF)
<b>Output</b>		
Output signal		
• Alarm output	4 ... 20/20 ... 4 mA 2-wire loop	4 ... 20/20 ... 4 mA 2-wire loop
• Switch output <sup>1)</sup>	Solid-state: 30 V DC/30 V AC, max. 82 mA	Max. switching voltage: 60 V DC/30 V AC Max. switching current: 1 A
• Fail-safe mode	Min. or max.	Min. or max.
<b>Accuracy</b>		
Repeatability	2 mm (0.08 inch)	2 mm (0.08 inch)
<b>Rated operating conditions<sup>2)</sup></b>		
Installation conditions		
• Location	Indoor/outdoor	Indoor/outdoor
Ambient conditions		
• Ambient temperature	-30 ... +85 °C (-22 ... +185 °F)	-10 ... +85 °C (14 ... 185 °F)
• Storage temperature	-40 ... +85 °C (-40 ... +185 °F)	-40 ... +85 °C (-40 ... +185 °F)
• Installation category	I	I
• Pollution degree	4	4
Medium conditions		
• Relative dielectric constant $\epsilon_r$	Min. 1.5	Min. 1.5
• Process temperature	-30 ... +100 °C (-22 ... +212 °F)	-10 ... +100 °C (14 ... 212 °F)
• Pressure (vessel)	-1 ... +10 bar g (-14.6 ... +146 psi g), nominal <sup>2)</sup>	-1 ... +10 bar g (-14.6 ... +146 psi g), nominal
• Degree of protection		
- Enclosure version	IP68/Type 4/NEMA 4	IP68/Type 4/NEMA 4
- Integral cable version	IP65/Type 4/NEMA 4	Not applicable
• Cable inlet	½" NPT (M20 x 1.5 optional)	½" NPT (M20 x 1.5 optional)
<b>Design</b>		
	<u>Enclosure/Integral cable version</u>	<u>Fully synthetic version</u>
Material		
• Body (Enclosure version)	Thermoplastic polyester	Thermoplastic polyester
• Lid (Enclosure version)	Transparent thermoplastic polycarbonate (PC)	Transparent thermoplastic polycarbonate (PC)
• Integrated cable body (Integral cable version)	316L stainless steel	Not applicable

	Stainless steel process connection (integral cable or enclosure version) (7ML5501)	Fully synthetic process connection (enclosure version only) (7ML5610)
Sensor length (nominal)	100 mm (4 inch)	100 mm (4 inch)
Process connection material of probe/wetted parts <sup>3)</sup>	Connection: 316L stainless steel; Process seal: FKM (optional FFKM); Sensor: PPS (optional PVDF) <sup>4)</sup>	PPS process connection and PPS sensor (Uni-Construction)
Connection (Enclosure version)	Internal 5-point terminal block, ½" NPT wiring entrance, M20 x 1.5 optional	Removable internal 5-point terminal block, ½" NPT wiring entrance, M20 x 1.5 optional
Connection (Integral cable version)	4 conductors, 1 m (3.3 ft), 0.5 mm <sup>2</sup> (22 AWG), shielded, polyester jacket	Not applicable
Process connection	¾" NPT [(Taper), ANSI/ASME B1.20.1] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	¾" NPT [(Taper), ANSI/ASME B1.20.1] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]
<b>Power supply</b>		
Standard	12 ... 33 V DC	12 ... 33 V DC
Intrinsically Safe	10 ... 30 V DC (Intrinsically Safe barrier required)	Not applicable
<b>Certificates and approvals</b>		
	<ul style="list-style-type: none"> <li>• General: CE, CSA, FM, RCM</li> <li>• Marine: Lloyds Register of Shipping, categories ENV1, ENV2, and ENV5 Dust Ignition Proof (barrier required): CSA/FM Class II and III, Div. 1, Groups E, F, G T4</li> <li>• Intrinsically Safe (barrier required): CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G T4 ATEX II 1 GD 1/2GD EEx ia IIC T4 to T6 T107 °C</li> <li>• Overfill protection: WHG (Germany)</li> </ul>	<ul style="list-style-type: none"> <li>• General: CSA, FM</li> </ul>

<sup>1)</sup> When synthetic process connection version (7ML5610) is used in wet locations, switching voltage of the relay is limited to 35 V DC/16 V AC.

<sup>2)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/13.

<sup>3)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit <http://www.usa.siemens.com/level>.


<sup>4)</sup> When FFKM O-ring (Option A22) is selected, process temperature is restricted to -20 °C (-4 °F).

## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS100


#### Options

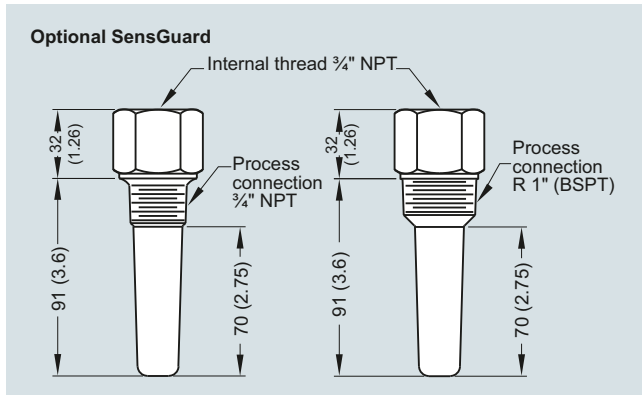

Optional SensGuard, dimensions in mm (inch)

**Characteristic curves**

**Pressure/temperature curve CLS100**  
Threaded process connections (7ML5501)

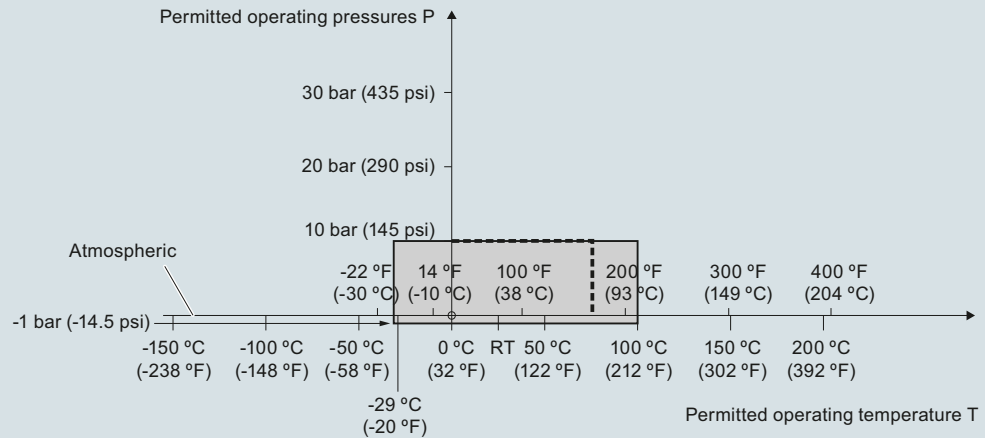


---- Example:  
Permitted operating pressure = 10 bar (145 psi) at 75 °C

Pointek CLS100 process pressure/temperature derating curves


**Dimensional drawings**

**Integral cable version**

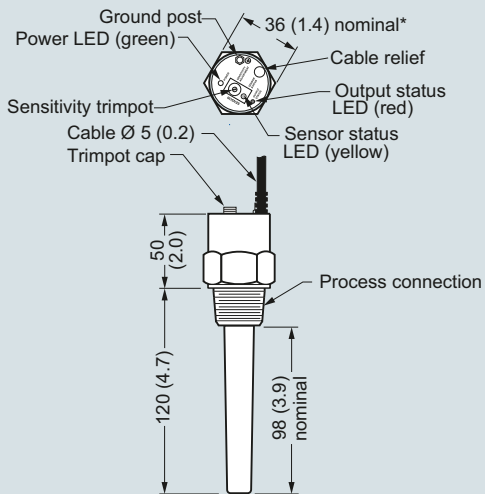

\*Some G thread configurations deviate from this size.

**Enclosure version**

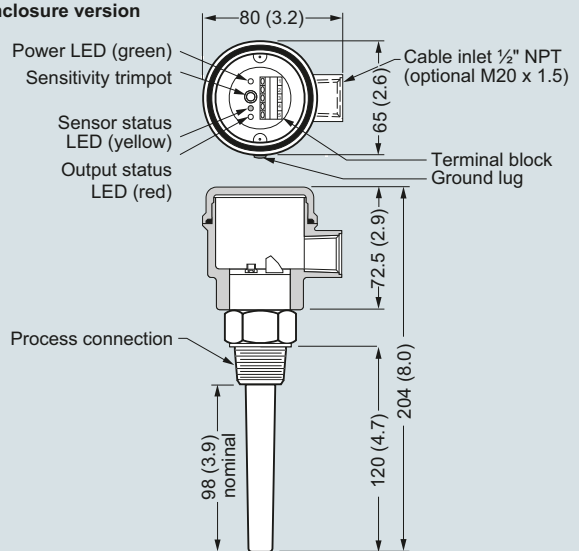

Pointek CLS100, dimensions in mm (inch)

## Level measurement


Point level measurement  
RF Capacitance switches

### Pointek CLS100


#### Circuit diagrams

##### Integral Cable Version - Non Intrinsically Safe only


LOW/HIGH Alarm




4/20 mA Loop Alarm

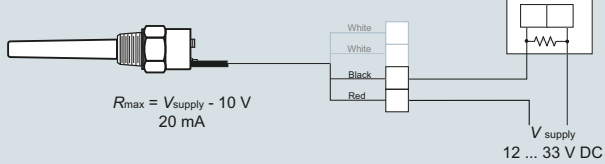

Solid State Switch Version



##### Enclosure and Fully Synthetic Version

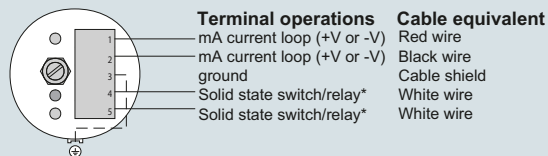

\* Switch/relay normally open in unpowered state


\* Relay not available on Pointek CLS100 IS version (7ML5501)

##### Note:

When driving an inductive load (for example, an external relay), a protection diode must be connected in the correct polarity to prevent possible switch damage due to inductive spikes generated by switching the inductor (please refer to instruction manual). Intrinsically Safe Models - please follow local regulations and area classifications; refer to instruction manual for more details.

Pointek CLS100 connections

## Overview

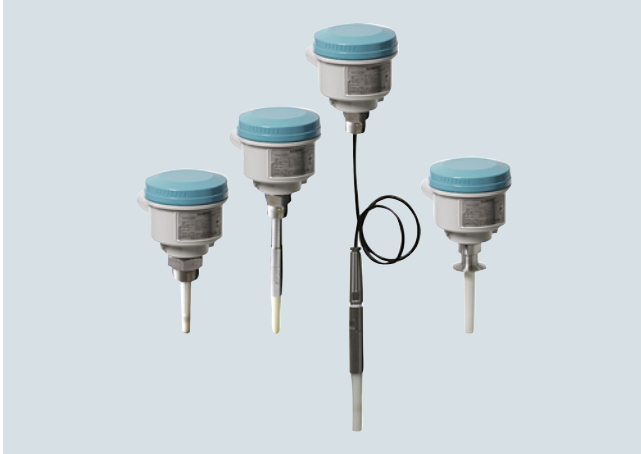

Pointek CLS200 (standard version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe.

## Benefits

- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- 3 LED indicators for sensor status, output status, and power
- Suitable for API 2350

## Application


Pointek CLS200 standard version has 3 LED indicators with basic relay and solid-state switch alarms. Universal switch for solids/liquids and interface.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 250 V AC/DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

## Configuration


### Installation

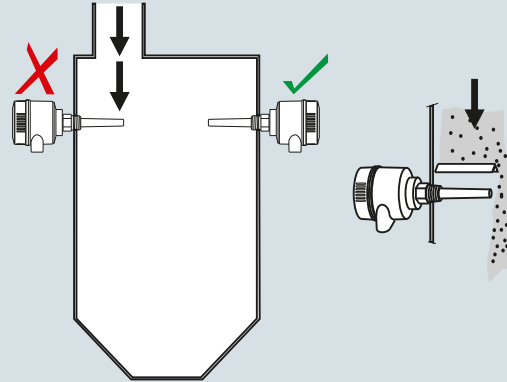

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

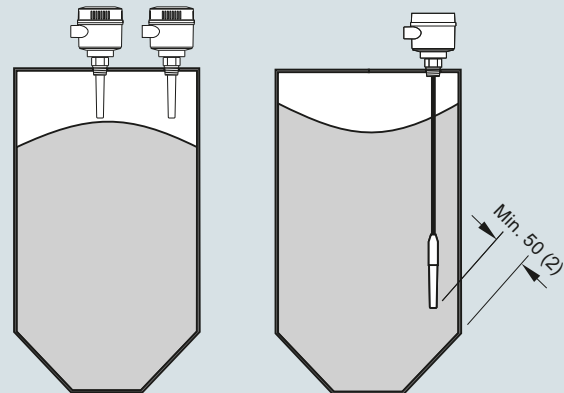

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

## Level measurement

### Point level measurement

### RF Capacitance switches

#### Pointek CLS200 - Standard

#### Technical specifications

<b>Mode of operation</b>	
Measuring principle	Inverse frequency shift capacitive level detection
<b>Input</b>	
Measured variable	Change in picoFarad (pF)
<b>Output</b>	
Output signal	
• Relay output	1 SPDT Form C relay
- Max. contact voltage	<ul style="list-style-type: none"> <li>• 30 V DC</li> <li>• 250 V AC</li> </ul>
- Max. contact current	<ul style="list-style-type: none"> <li>• 5 A DC</li> <li>• 8 A AC</li> </ul>
- Max. switching capacity	150 W DC
- Time delay (ON and/or OFF)	2 000 VA AC
• Solid-state output	1 ... 60 s
- Output	Galvanically isolated
- Protection	Against reversed polarity (bipolar)
- Max. switching voltage	<ul style="list-style-type: none"> <li>• 30 V DC</li> <li>• 30 V peak AC</li> </ul>
- Max. load current	82 mA
- Voltage drop	< 1 V, typical at 50 mA
- Time delay (pre or post switching)	1 ... 60 s
<b>Rated operating conditions<sup>1)</sup></b>	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>
• Storage temperature	-40 ... +85 °C (-40 ... +185 °F)
• Installation category	II
• Pollution degree	4
Medium conditions	Liquids, bulk solids, slurries and interfaces
• Relative dielectric constant $\epsilon_r$	Min. 1.5
• Process temperature	
- Without thermal isolator	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>
- With thermal isolator	-40 ... +125 °C (-40 ... +257 °F)
• Process pressure (rod version)	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)
• Process pressure (cable version) <sup>3)</sup>	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)
• Process pressure (sliding coupling version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)
<b>Electromagnetic compatibility</b>	
To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual.	

<b>Design</b>	
Material	
• Enclosure	Epoxy-coated aluminum with gasket
• Optional thermal isolator	316L stainless steel
Connection	Removable terminal block, max. 2.5mm <sup>2</sup>
Degree of protection	IP65/Type 4/NEMA 4 (optional IP68)
Cable inlet	2 x M20 x 1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)
<b>Power supply</b>	
12 ... 250 V AC/DC, 0 ... 60 Hz max. 2 W	
<b>Certificates and approvals</b>	
General Purpose	CSA, FM, CE, RCM
Dust Ignition Proof	ATEX II ½ D T100 °C
Flameproof Enclosure With IS Probe	ATEX II 1 G EEx d[ia] IIC T6 ... T4 ATEX II ½ D T100 °C
Dust Ignition Proof with IS Probe	CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Explosion Proof Enclosure With IS Probe	CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Marine	Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
Overfill Protection	WHG (Germany) VLAREM II
Others	Pattern Approval (China), SIL

<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/34.

<sup>2)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

<sup>3)</sup> Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/34.

**Technical specifications** (continued)

<b>Design: Probe</b>				
	<b>Rod version</b>	<b>Sanitary version</b>	<b>Cable version</b>	<b>Sliding Coupling version</b>
Max. length	5 500 mm (216.53 inch)	5 500 mm (216.53 inch)	<ul style="list-style-type: none"> <li>• 30 000 mm (1 181.1 inch) liquids and slurries</li> <li>• 5 000 mm (196.85 inch) solids (under loads)</li> </ul>	5 500 mm (216.53 inch)
Process connection	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]  316L stainless steel ASME/EN flange	1½", 2" sanitary fitting clamp 316L stainless steel	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]  316L stainless steel ASME/EN flange	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated <sup>1)</sup>	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator <sup>3)</sup>	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length


<sup>1)</sup> PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

<sup>2)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit <http://www.usa.siemens.com/level>.

<sup>3)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)




**Options**

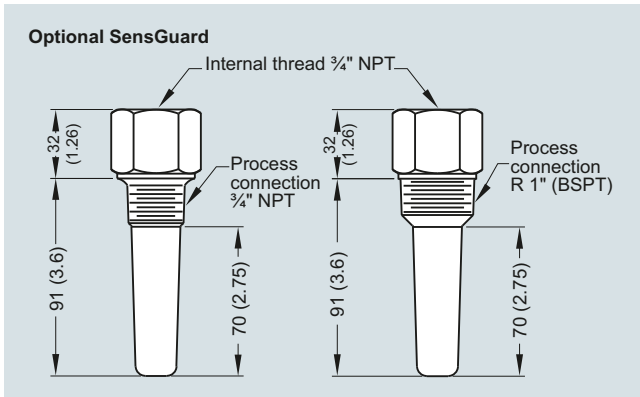

Optional SensGuard, dimensions in mm (inch)

**Characteristic curves**

**Pressure/temperature curve**  
CLS200 sliding coupling  
threaded process connections  
(7ML5633 and 7ML5643)

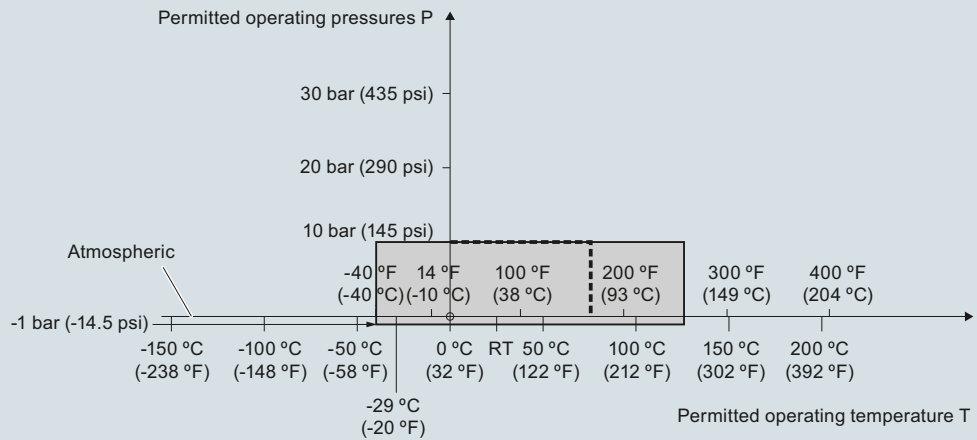

Pointek CLS200 process pressure/temperature derating curves (7ML5633 and 7ML5643)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Standard


#### Characteristic curves (continued)

**Pressure/temperature curve**  
CLS200 cable  
Threaded process connections  
(7ML5631 and 7ML5641)

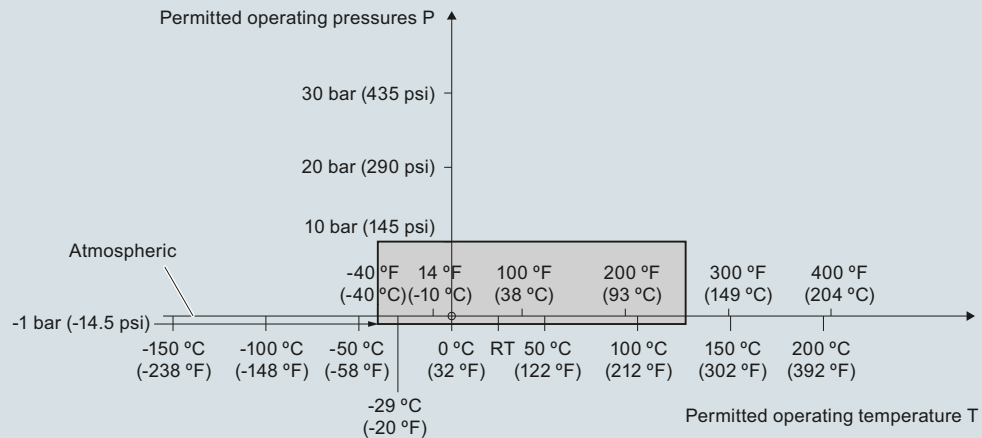

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


**Pressure/temperature curve**  
CLS200 compact and extended rod  
Threaded process connections  
(7ML5630 and 7ML5640)

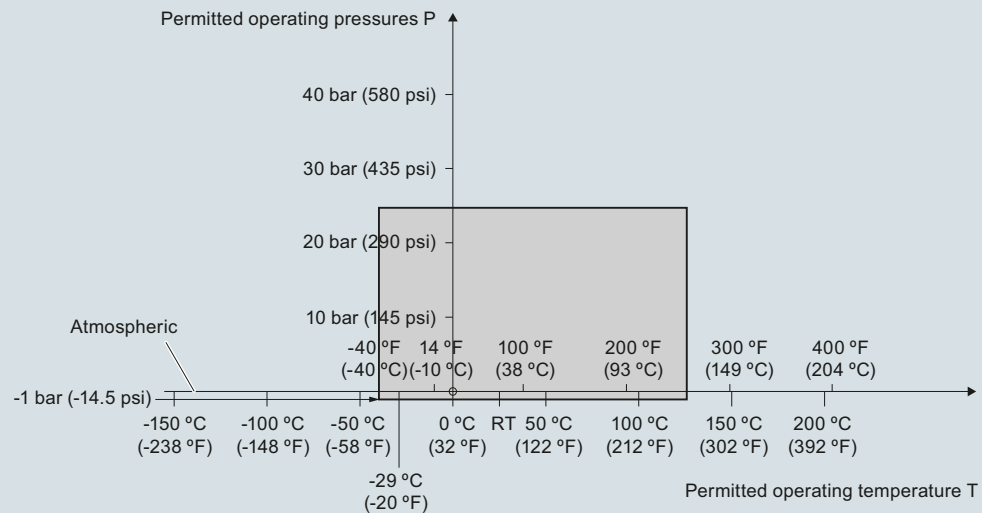

Pointek CLS200 process pressure/temperature derating curves (7ML5630 or 7ML5640)


**Characteristic curves (continued)**

**Pressure/temperature curve**  
**CLS200 compact and extended sanitary type**  
**Sanitary process connections**  
**(7ML5632 and 7ML5642)**

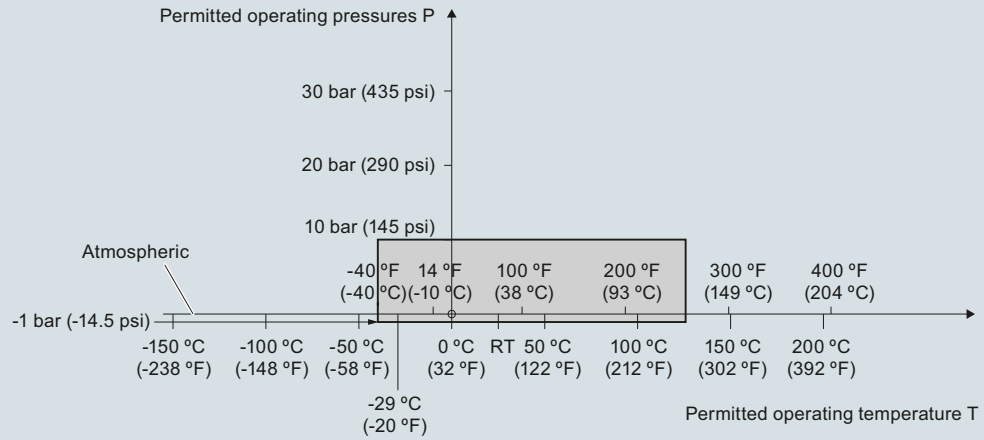

Pointek CLS200 process pressure/temperature derating curves (7ML5632 and 7ML5642)

**Pressure/temperature curve**  
**CLS200, cable**  
**ASME flanged process connections**  
**(7ML5631 and 7ML5641)**

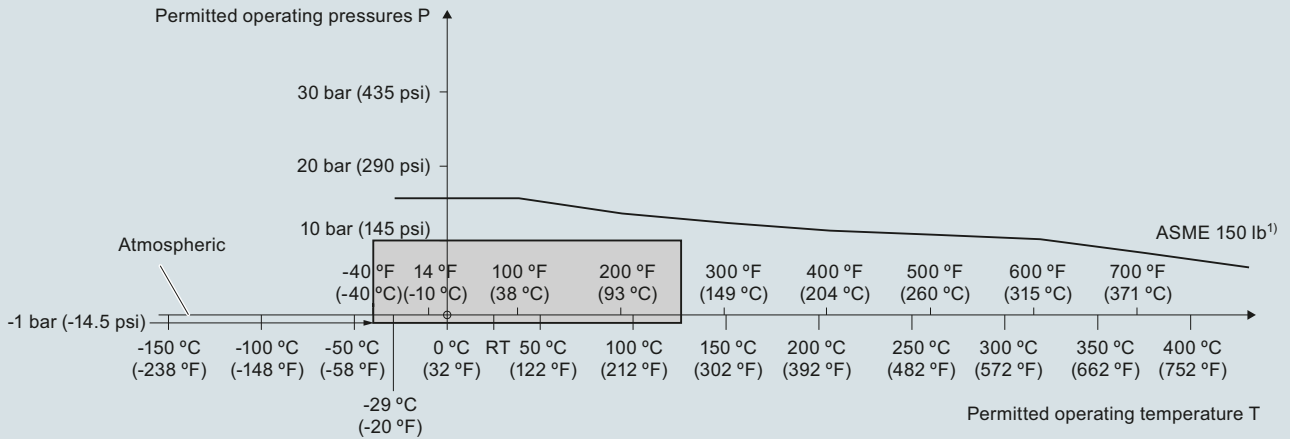

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Standard

#### Characteristic curves (continued)


**Pressure/temperature curve**  
CLS200 compact and extended rod  
ASME flanged process connections  
(7ML5630 and 7ML5640)

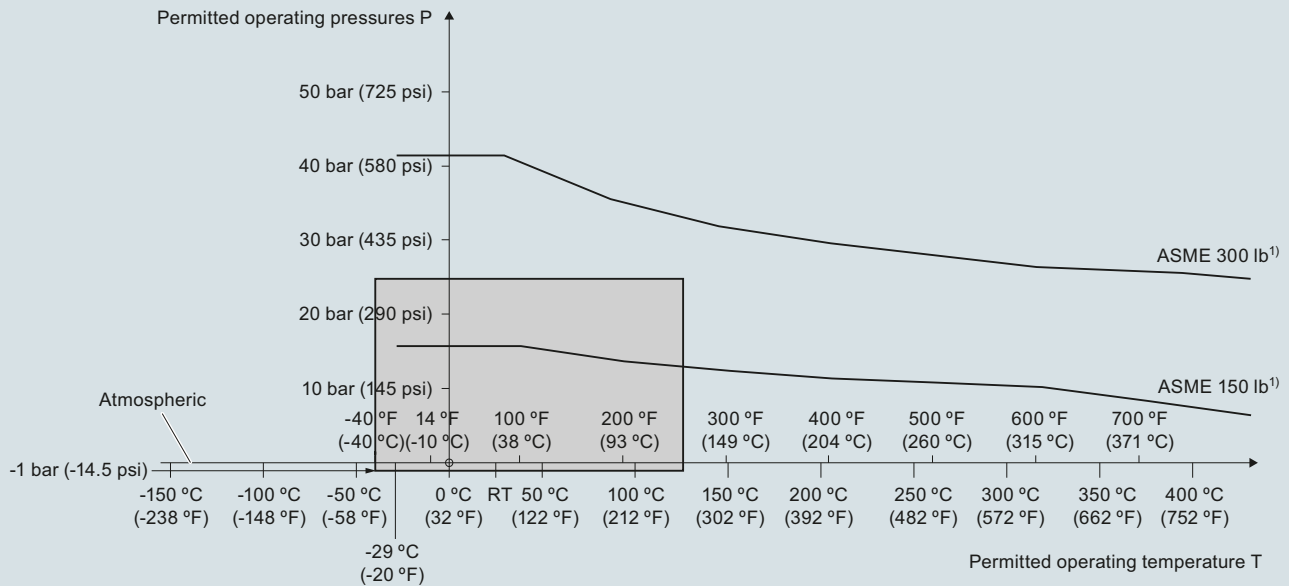

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

**Pressure/temperature curve**  
CLS200 cable  
EN flanged process connections  
(7ML5631 and 7ML5641)

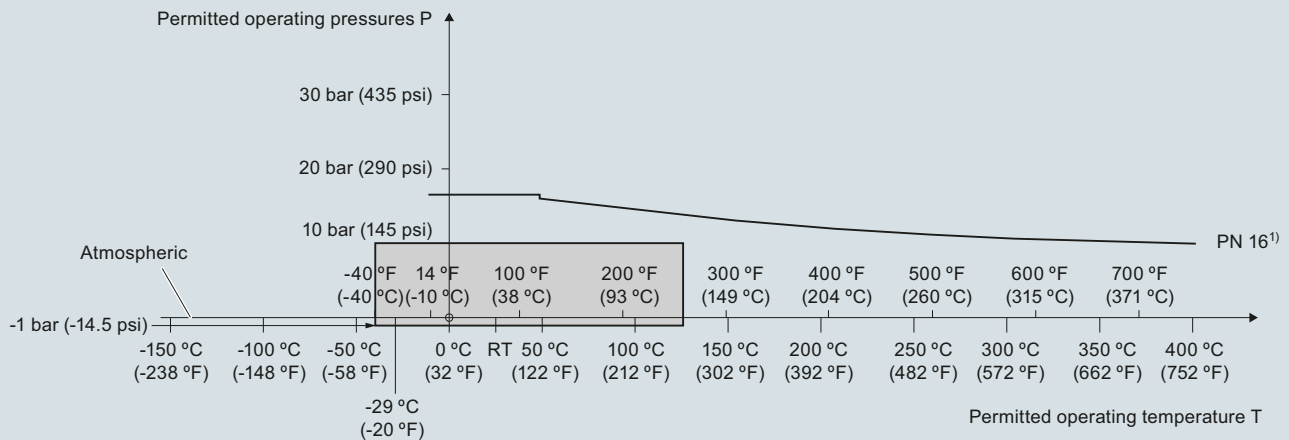


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

**Characteristic curves** (continued)

**Pressure/Temperature Curve**  
**CLS200 Compact and Extended Rod**  
**EN Flanged Process Connections**  
**(7ML5630 and 7ML5640)**

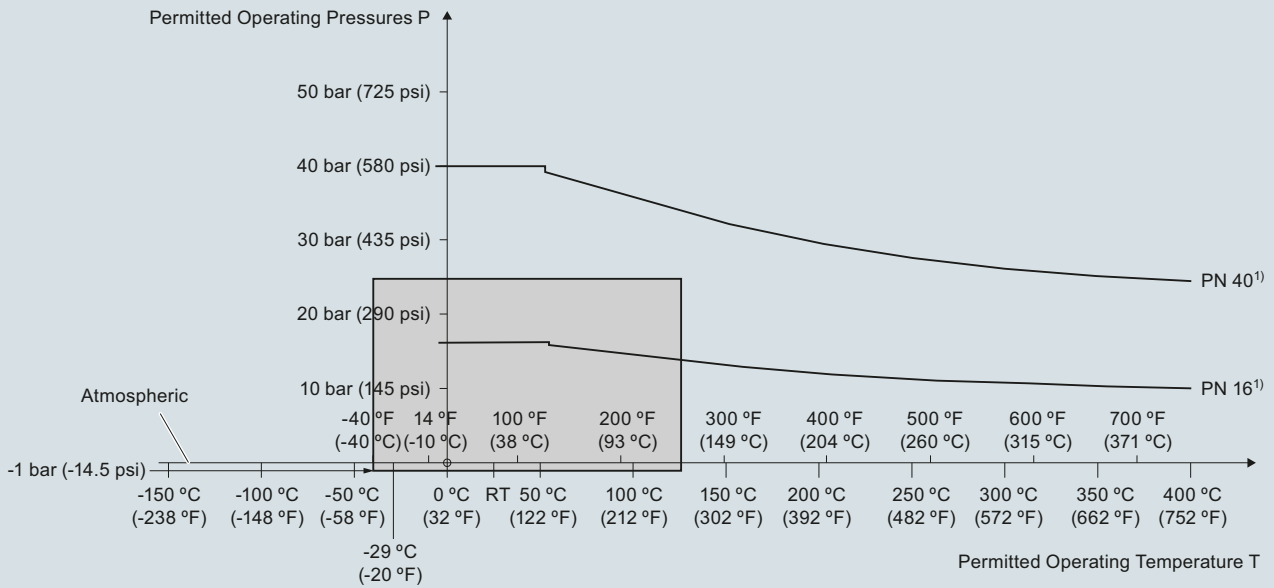

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)


## Level measurement

Point level measurement  
RF Capacitance switches


### Pointek CLS200 - Standard

#### Dimensional drawings


##### Compact version Threaded (7ML5630 and 7ML5640)

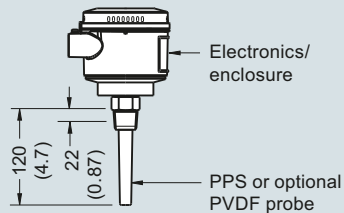

##### Sanitary compact version Sanitary fitting (7ML5632 and 7ML5642)

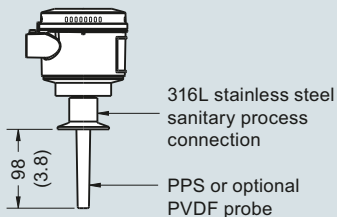


##### Extended rod version Threaded (7ML5630 and 7ML5640)

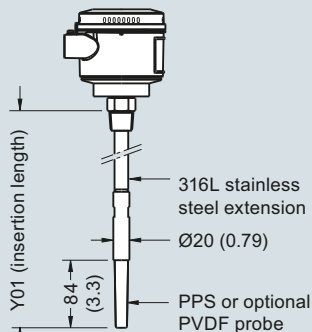


Min. insertion length = 200 (7.87)  
Max. insertion length = 5 500 (216)


##### Extended cable version Threaded (7ML5631 and 7ML5641)

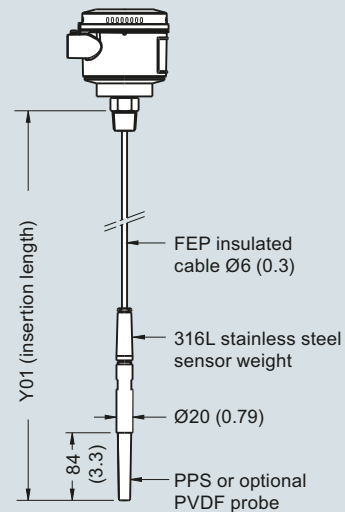

Min. insertion length = 500 (19.69)  
Max. insertion length = 30 000 (1 181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

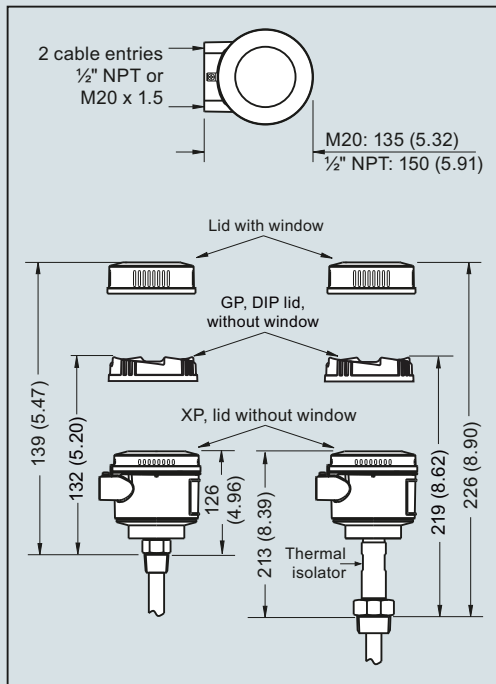


##### Sanitary extended version Sanitary fitting (7ML5632 and 7ML5642)

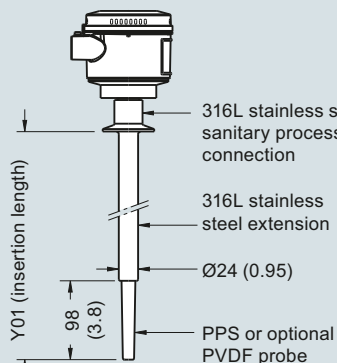

Min. insertion length = 110 (4.3)  
Max. insertion length = 5 500 (216)

##### Sliding coupling version Threaded (7ML5633 and 7ML5643)


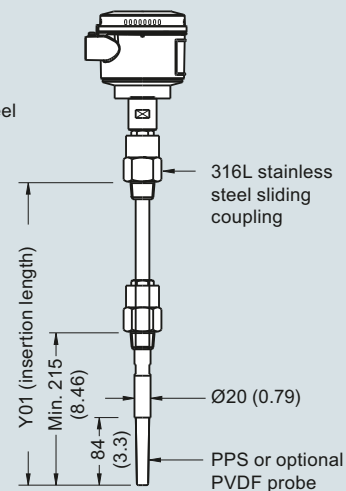


Min. insertion length = 350 (13.82)  
Max. insertion length = 5 500 (216)


Pointek CLS200 threaded/sanitary process connection, dimensions in mm (inch)

**Dimensional drawings** (continued)

**Compact version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

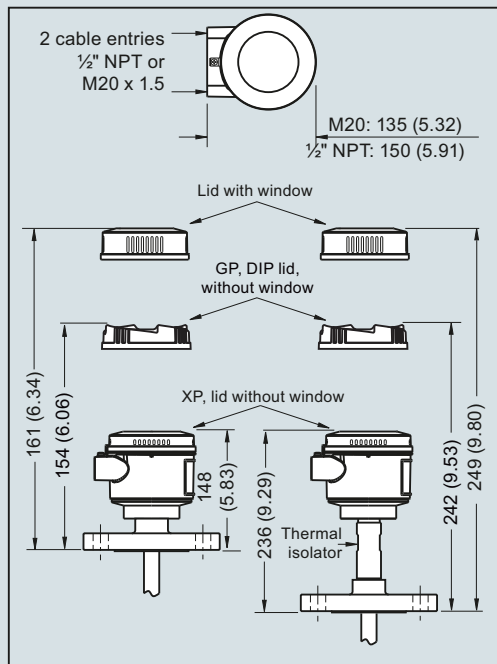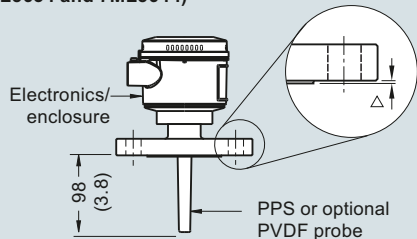


**Extended rod version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)



Min. insertion length = 200 (7.87)  
Max. insertion length = 5 500 (216)

**Extended cable version**  
Welded Flange  
(7ML5631 and 7ML5641)

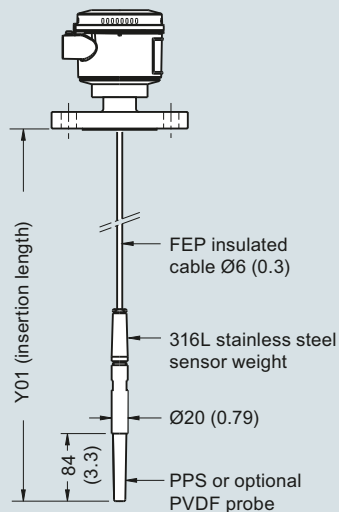

Min. insertion length = 500 (19.69)  
Max. insertion length = 30 000 (1 181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)

Pointek CLS200 flanged process connections, dimensions in mm (inch)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Standard

#### Circuit diagrams


##### Wiring: Pointek CLS200 standard

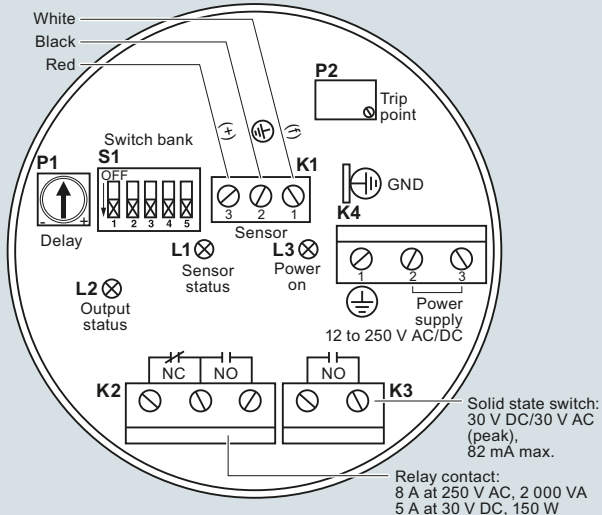

##### Notes:

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

##### Wiring: Pointek CLS200 Digital

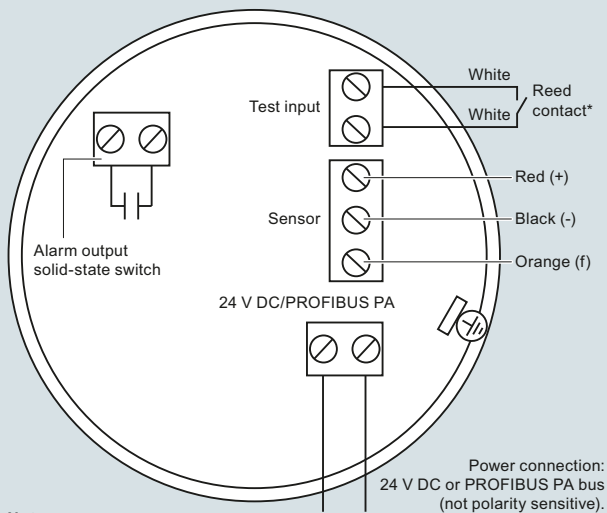

##### Notes:

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

##### \*Magnet activated sensor Test

A magnet can be used to test the sensor without opening the lid of the Pointek CLS200 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS200 connections



#### Overview



Pointek CLS200 (digital version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

#### Benefits

- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

#### Application

Pointek CLS200 digital version provides an integral LCD display for stand-alone use, and also provides PROFIBUS PA communication (Profile version 3.0, Class B) for connection to a network.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 30 V DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The menu-driven setup allows precise control of the switch point signal damping and alarm functions.


When connected to the PROFIBUS network, advanced diagnostics and set up using SIMATIC PDM are possible.

The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).

- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

#### Configuration


##### Installation

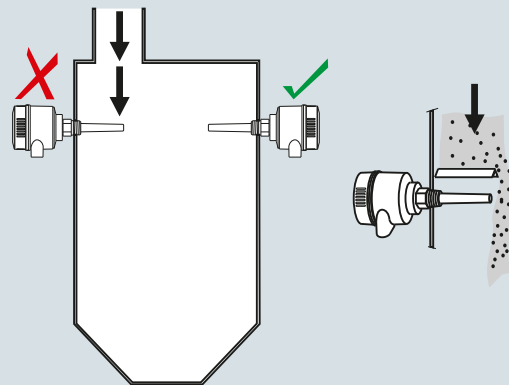

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

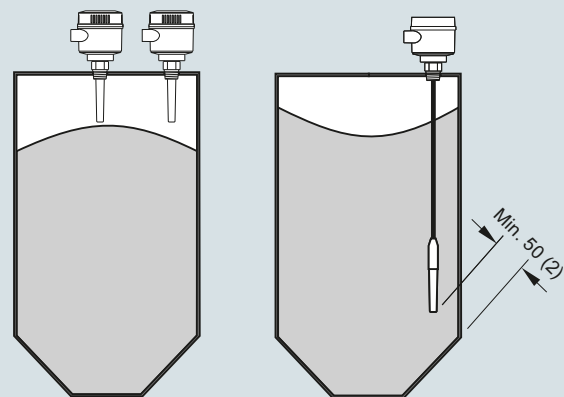

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

# Level measurement

## Point level measurement

### RF Capacitance switches

#### Pointek CLS200 - Digital

#### Technical specifications

<b>Mode of operation</b>	
Measuring principle	Inverse frequency shift capacitive level detection
<b>Input</b>	
Measured variable	Change in picoFarad (pF)
<b>Output</b>	
Output signal	
• Solid-state output	
- Output	Galvanically isolated
- Protection	Against reversed polarity (bipolar)
- Max. switching voltage	• 30 V (DC) • 30 V peak (AC)
- Max. load current	82 mA
- Voltage drop	< 1 V, typical at 50 mA
- Time delay (ON and/or OFF)	Programmable by user (0 ... 100 s)
• Fail-safe mode	Min. or max.
• Connection	Removable terminal block
<b>Rated operating conditions<sup>1)</sup></b>	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>
• Storage temperature	-40 ... +85 °C (-40 ... +185 °F)
• Installation category	II
• Pollution degree	4
Medium conditions	Liquids, bulk solids, slurries, and interfaces
• Relative dielectric constant $\epsilon_r$	Min. 1.5
• Process temperature	
- Without thermal isolator	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>
- With thermal isolator	-40 ... +125 °C (-40 ... +257 °F)
• Process pressure (rod version)	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)
• Process pressure (cable version) <sup>3)</sup>	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)
• Process pressure (sliding coupling version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)
<b>Design</b>	
Material	
• Enclosure	Epoxy-coated aluminum with gasket
• Optional thermal isolator	316L stainless steel
Connection	Removable terminal block, max. 2.5 mm <sup>2</sup>
Degree of protection	IP65/Type 4/NEMA 4 (optional IP68)
Cable inlet	2 x M20 x 1.5 thread (option: 2 x 1/2" NPT conduit entry including 1 plugged entry)
Electromagnetic compatibility	To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual.

<b>Power supply</b>	
Bus voltage	Standard: 12 ... 30 V DC Intrinsically Safe: 12 ... 24 V DC
Current consumption	12.5 mA
<b>Certificates and approvals</b>	
General Purpose	CSA, FM, CE, RCM
Dust Ignition Proof	ATEX II 1/2 D T100 °C
Dust Ignition Proof with IS Probe	CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Flameproof Enclosure with IS Probe	ATEX II 1/2 G EEx d[ia] IIC T6 ... T4 ATEX II 1/2 D T100 °C
Explosion Proof with IS Probe	CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Intrinsically Safe <sup>4)</sup>	ATEX II 1 G EEx ia IIC T6 ... T4 ATEX II 1/2 D IP6X T100 °C CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Non-incendive	CSA/FM Class I, Div. 2, Groups A, B, C, D CSA/FM Class II, Div. 2, Groups F, G CSA/FM Class III T4 or T6
Non-Sparking	ATEX II 3 G Ex nA II T6 ... T4 ATEX II 2 D IP6X T100 °C
Marine	Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
Others	Pattern Approval (China)
<b>Communication</b>	
	PROFIBUS PA (IEC 61158 CPF3 CP3/2) Bus physical layer: IEC 61158-2 MBP (IS) Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B FISCO field device

<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/36.

<sup>2)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

<sup>3)</sup> Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/34.

<sup>4)</sup> Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection


**Technical specifications** (continued)

<b>Design: Probe</b>				
	<b>Rod version</b>	<b>Sanitary version</b>	<b>Cable version</b>	<b>Sliding Coupling version</b>
Max. length	5 500 mm (216.53 inch)	5 500 mm (216.53 inch)	<ul style="list-style-type: none"> <li>• 30 000 mm (1 181.1 inch) liquids and slurries</li> <li>• 5 000 mm (196.85 inch) solids (under loads)</li> </ul>	5 500 mm (216.53 inch)
Process connection	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	1½", 2" sanitary fitting clamp 316L stainless steel	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	R ¾", 1", 1¼", 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]  ¾", 1", 1¼", 1½" NPT [(Taper), ANSI/ASME B1.20.1]  G ¾", 1", 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated <sup>1)</sup>	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator <sup>3)</sup>	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length

1) PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

2) For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit <http://www.usa.siemens.com/level>.

3) Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F).

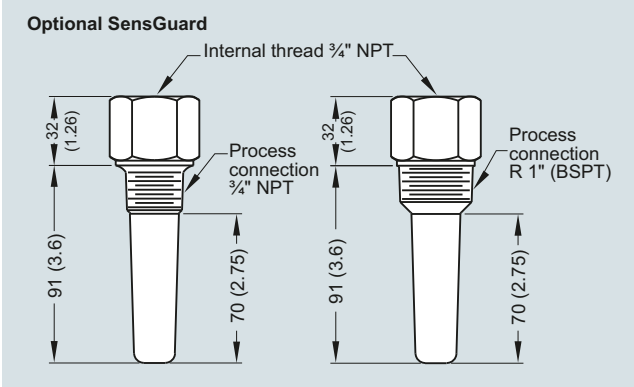Selection and ordering data	Article No.	Options
<p><b>Accessories</b></p> <p>SensGuard, 3/4" NPT (PPS). Only available for CLS200 with 3/4" NPT thread.</p> <p>SensGuard, R 1" (BSPT) (PPS). Only available for CLS200 with 3/4" NPT thread.</p> <p>One metallic cable gland M20 x 1.5, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, with integrated shield connection (available for PROFIBUS PA)</p> <p><b>General Purpose</b></p> <p>1/2" NPT General Purpose Cable Entry IP68/IP69K NEMA 6, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, cable size 6 ... 12 mm (0.236 ... 0.472 inch)</p> <p>M20 x 1.5 General Purpose Cable Entry IP68/IP69K NEMA 6, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, cable size 7 ... 12 mm (0.275 ... 0.472 inch)</p> <p><b>Hazardous Locations</b></p> <p>1/2" NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22, and in Gas Groups IIA, IIB and IIC) 60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)</p> <p>M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC) 60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)</p> <p><b>Blind threaded flanges are available.</b> Customers interested in a custom designed device should consult a local sales person. For more information, please visit <a href="http://www.usa.siemens.com/level">http://www.usa.siemens.com/level</a>.</p>	<p><b>7ML1830-1DL</b></p> <p><b>7ML1830-1DM</b></p> <p><b>7ML1930-1AQ</b></p> <p><b>7ML1830-1JA</b></p> <p><b>7ML1830-1JC</b></p> <p><b>7ML1830-1JB</b></p> <p><b>7ML1830-1JD</b></p>	<p><b>Optional SensGuard</b></p>  <p>Optional SensGuard, dimensions in mm (inch)</p>
<p><b>Pointek Specials</b></p>	<p>See page <b>4/70</b></p>	


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Digital

#### Characteristic curves


**Pressure/temperature curve**  
CLS200 sliding coupling  
threaded process connections  
(7ML5633 and 7ML5643)

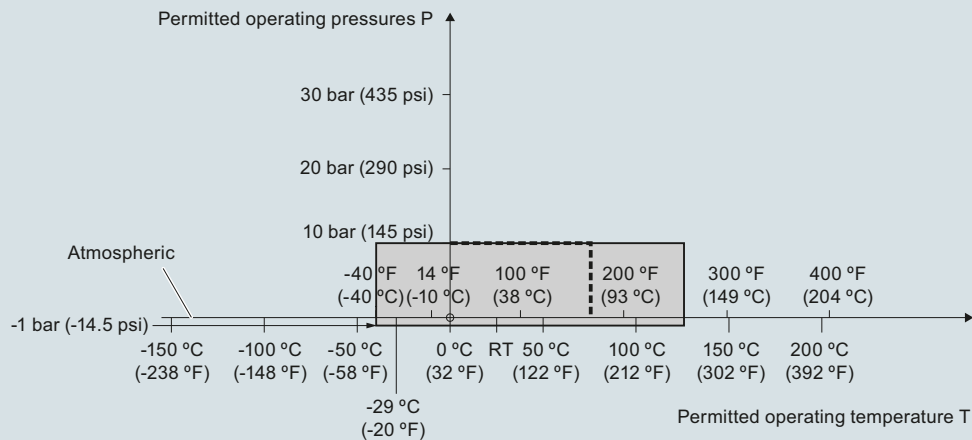

----- Example:  
Permitted operating pressure = 10 bar (145 psi) at 75 °C

Pointek CLS200 process pressure/temperature derating curves (7ML5633 and 7ML5643)


**Pressure/temperature curve**  
CLS200 cable  
Threaded process connections  
(7ML5631 and 7ML5641)

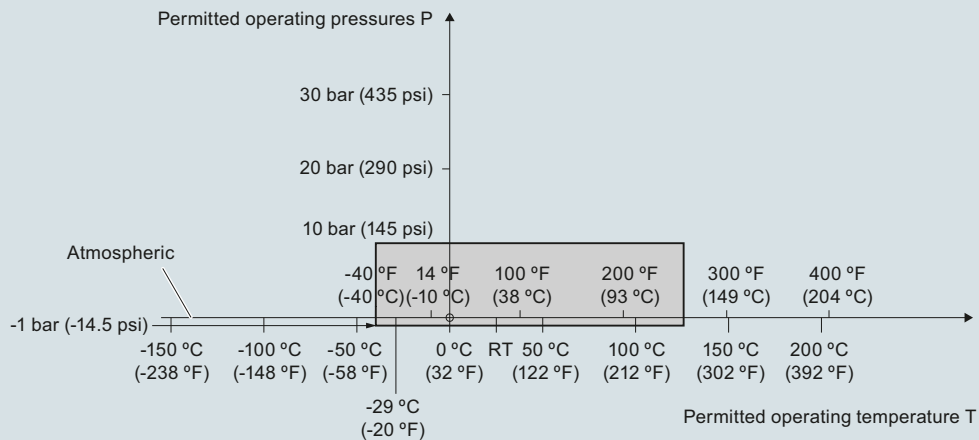

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


**Characteristic curves** (continued)

**Pressure/temperature curve**  
**CLS200 compact and extended rod**  
**Threaded process connections**  
**(7ML5630 and 7ML5640)**

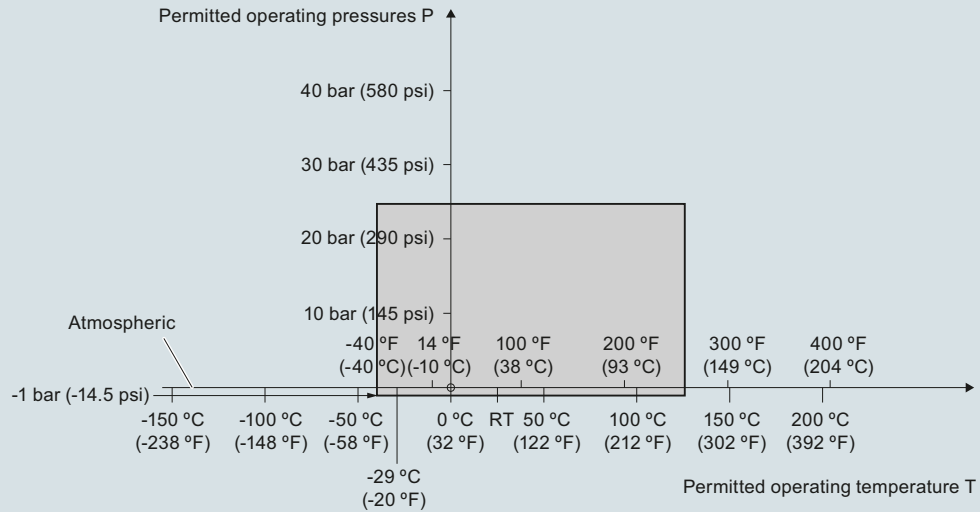

Pointek CLS200 process pressure/temperature derating curves (7ML5630 or 7ML5640)

**Pressure/temperature curve**  
**CLS200 compact and extended sanitary type**  
**Sanitary process connections**  
**(7ML5632 and 7ML5642)**

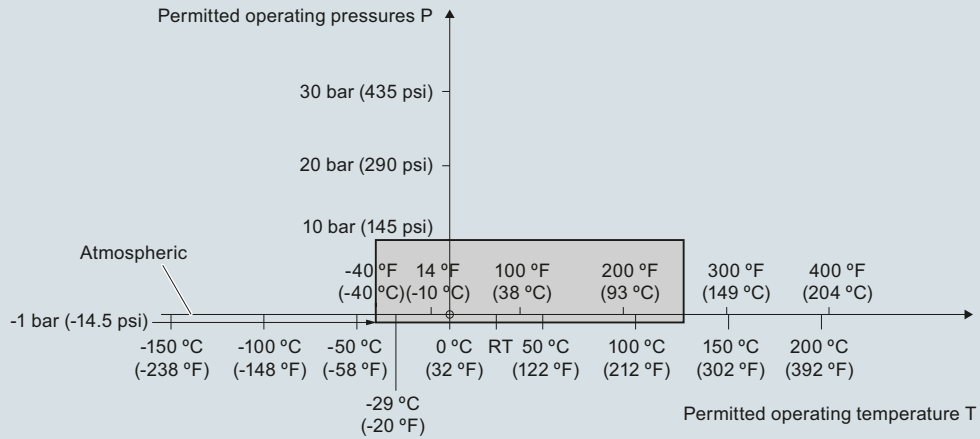

Pointek CLS200 process pressure/temperature derating curves (7ML5632 and 7ML5642)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Digital

#### Characteristic curves (continued)


**Pressure/temperature curve**  
CLS200, cable  
ASME flanged process connections  
(7ML5631 and 7ML5641)

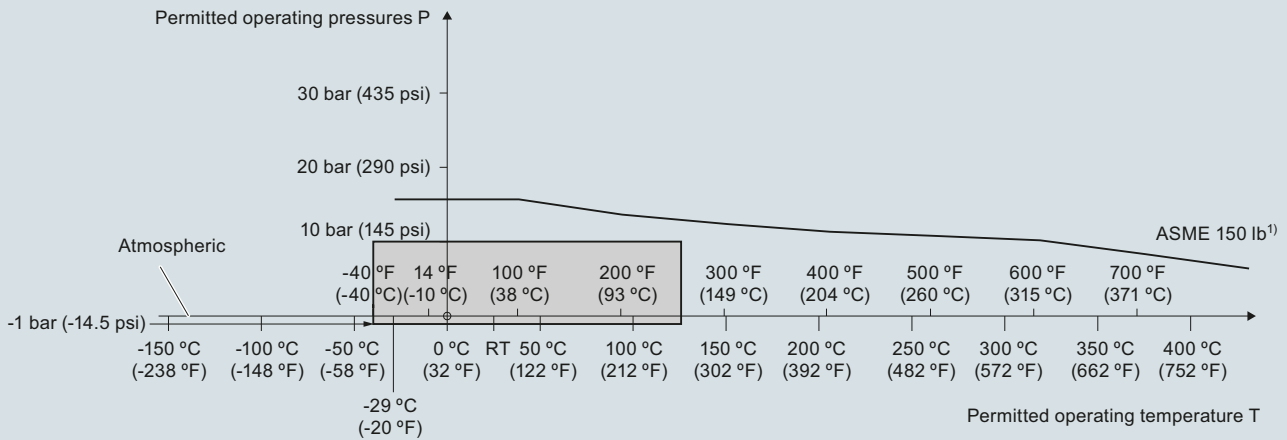

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

**Pressure/temperature curve**  
CLS200 compact and extended rod  
ASME flanged process connections  
(7ML5630 and 7ML5640)

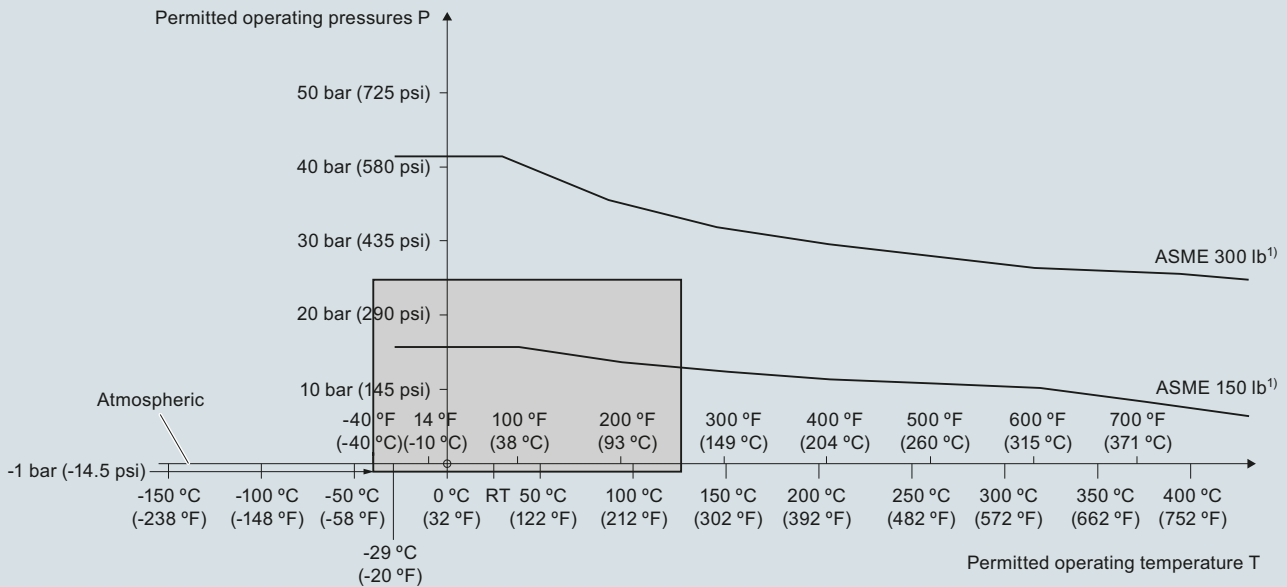


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

4

**Characteristic curves (continued)**


**Pressure/temperature curve**  
CLS200 cable  
EN flanged process connections  
(7ML5631 and 7ML5641)

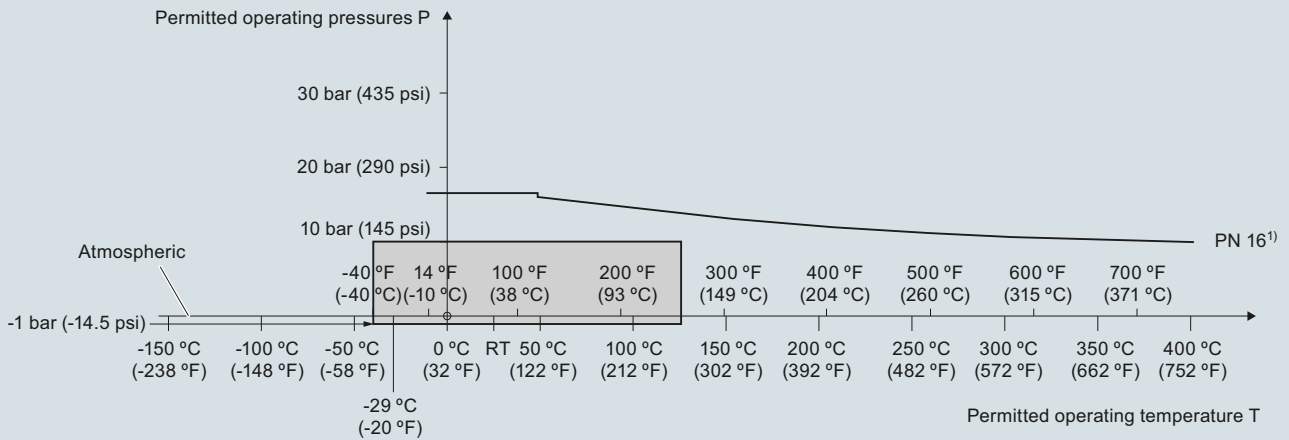

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

**Pressure/Temperature Curve**  
CLS200 Compact and Extended Rod  
EN Flanged Process Connections  
(7ML5630 and 7ML5640)

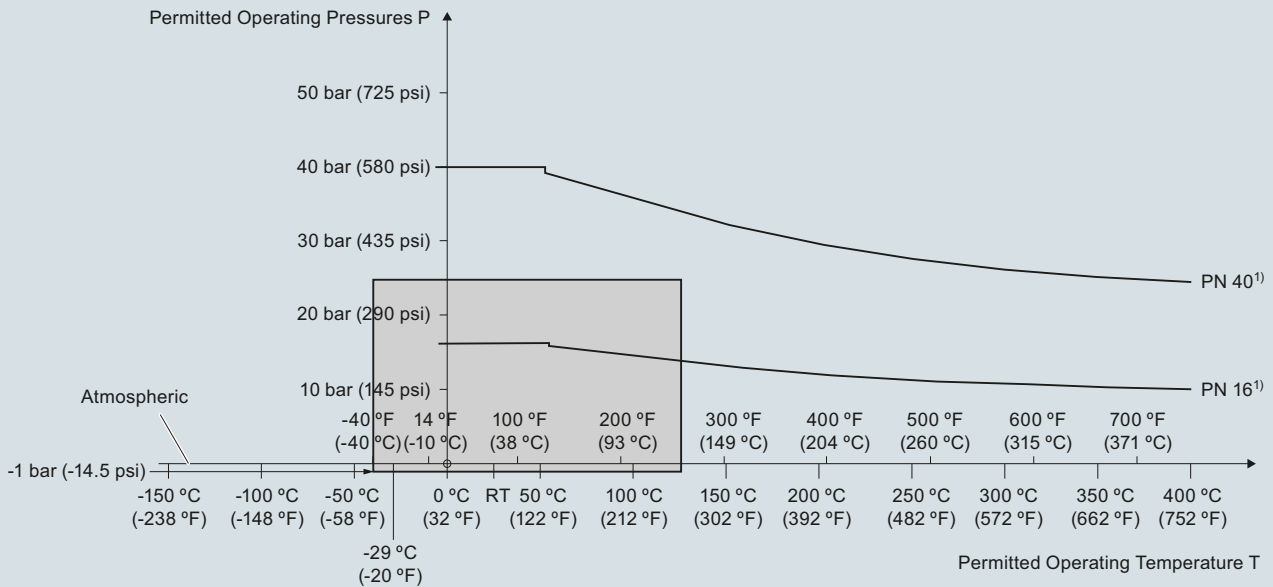

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)




## Level measurement

Point level measurement  
RF Capacitance switches


### Pointek CLS200 - Digital

#### Dimensional drawings


##### Compact version Threaded (7ML5630 and 7ML5640)



##### Sanitary compact version Sanitary fitting (7ML5632 and 7ML5642)




##### Extended rod version Threaded (7ML5630 and 7ML5640)




Min. insertion length = 200 (7.87)  
Max. insertion length = 5 500 (216)


##### Extended cable version Threaded (7ML5631 and 7ML5641)

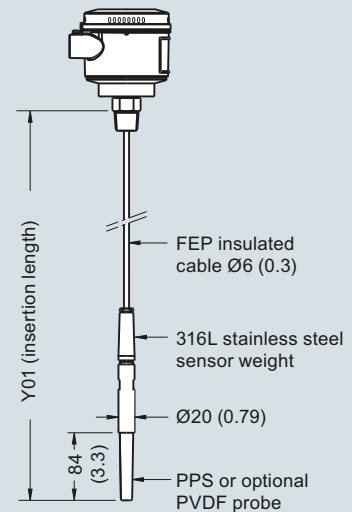

Min. insertion length = 500 (19.69)  
Max. insertion length = 30 000 (1 181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

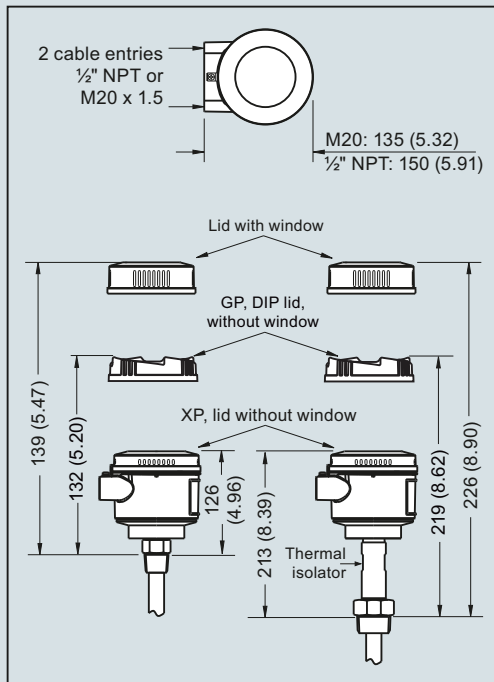


##### Sanitary extended version Sanitary fitting (7ML5632 and 7ML5642)

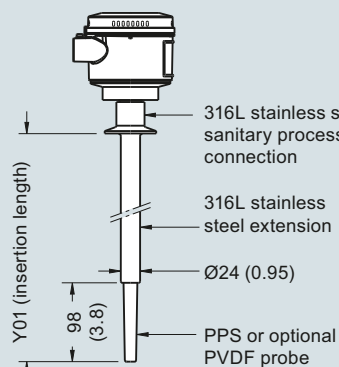

Min. insertion length = 110 (4.3)  
Max. insertion length = 5 500 (216)

##### Sliding coupling version Threaded (7ML5633 and 7ML5643)


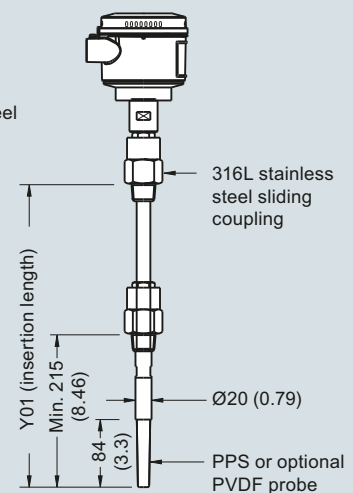


Min. insertion length = 350 (13.82)  
Max. insertion length = 5 500 (216)


Pointek CLS200 threaded/sanitary process connections, dimensions in mm (inch)

**Dimensional drawings** (continued)

**Compact version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

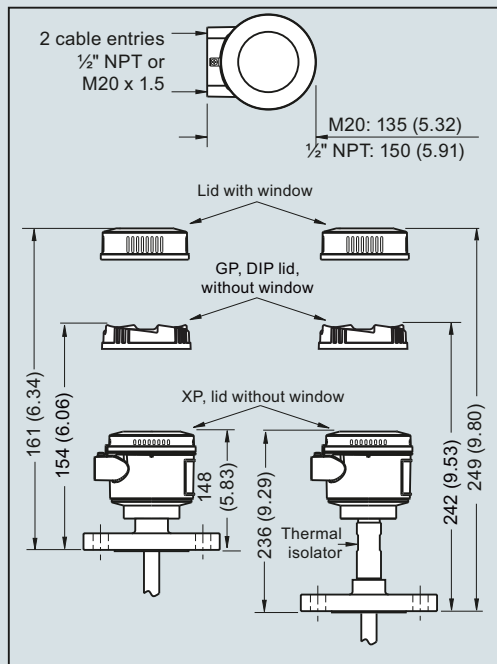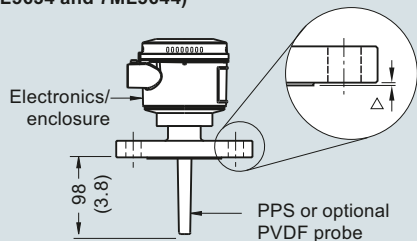


**Extended rod version**  
Welded Flange (7ML5630 and 7ML5640)  
Welded Flange, PFA coated  
(7ML5634 and 7ML5644)

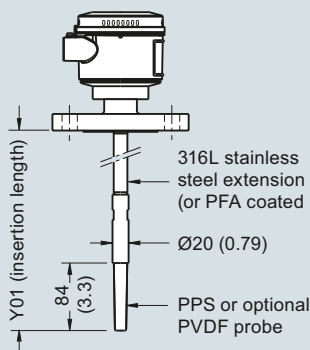

Min. insertion length = 200 (7.87)  
Max. insertion length = 5 500 (216)

**Extended cable version**  
Welded Flange  
(7ML5631 and 7ML5641)

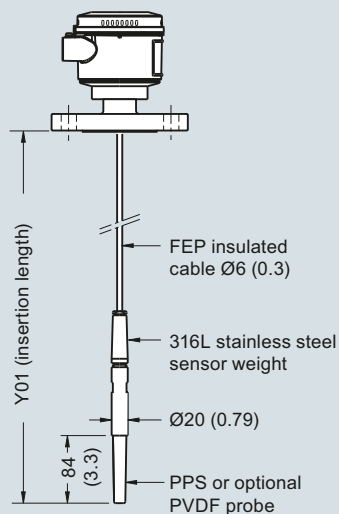

Min. insertion length = 500 (19.69)  
Max. insertion length = 30 000 (1 181)  
Applicable for liquids and solids applications. Cable can be shortened on site.

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)

Pointek CLS200 flanged process connections, dimensions in mm (inch)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS200 - Digital

#### Circuit diagrams


##### Wiring: Pointek CLS200 standard

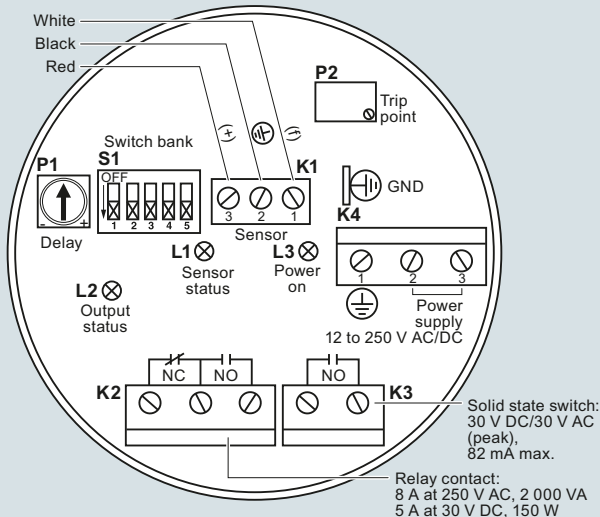

##### Notes:

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

##### Wiring: Pointek CLS200 Digital

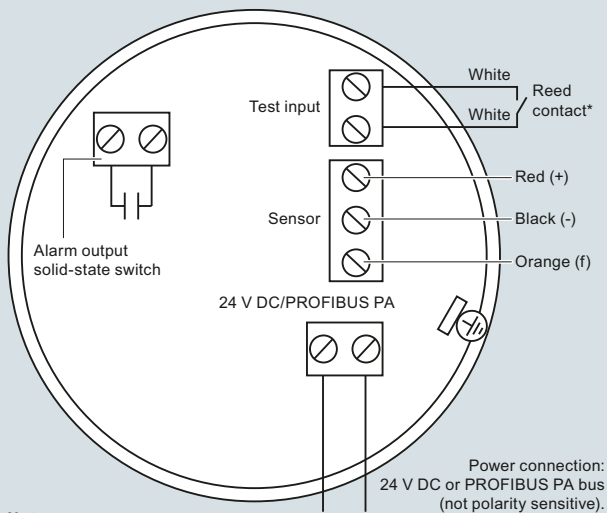

##### Notes:

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

##### \*Magnet activated sensor Test


A magnet can be used to test the sensor without opening the lid of the Pointek CLS200 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS200 connections

4

## Overview

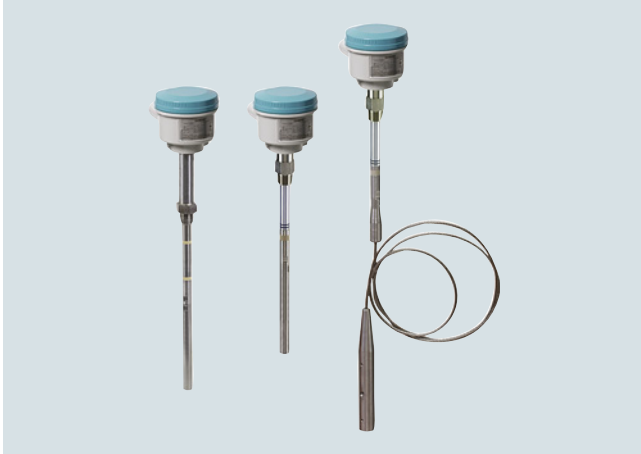

Pointek CLS300 (standard version) is an inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS300 is ideal for detecting liquids, solids, slurries, foam, and interfaces in demanding conditions where high pressure and temperatures are present and has the ability to tune out buildup on the probe.

## Benefits

- Active-Shield technology so measurement is unaffected by material buildup or nozzle interference in active shield section
- Performs in extremely abrasive conditions because of solid rod construction
- Three LED indicators for adjustment control, output status, and power
- High-temperature version up to 400 °C (752 °F)

## Application

Pointek CLS300 standard version has three LED indicators with basic relay and solid-state switch alarms.

The robust design of CLS300 makes it specifically applicable for heavy solids applications where abrasive materials occur as in the mining industry. The fully potted electronics are unaffected by condensation, dust or vibration.


Wetted parts are made of stainless steel with a PFA shield for high chemical resistance, and of ceramic and stainless steel for high temperature version. Materials with low or high dielectric constants can be accurately detected. The unique Active Shield suppresses interference from material buildup or long installation nozzles.

The unique modular design of the Pointek CLS300 provides a wide range of configurations, process connections, extensions and approvals to meet the temperature and pressure requirements of specific applications. The modular design makes ordering easier and reduces stocking requirements. A wide range of probe configurations are available, including rod and cable versions.


- Key Applications: liquids, slurries, bulk solids, relatively high pressure and temperature, hazardous areas, milling and mining applications

## Configuration


### Installation

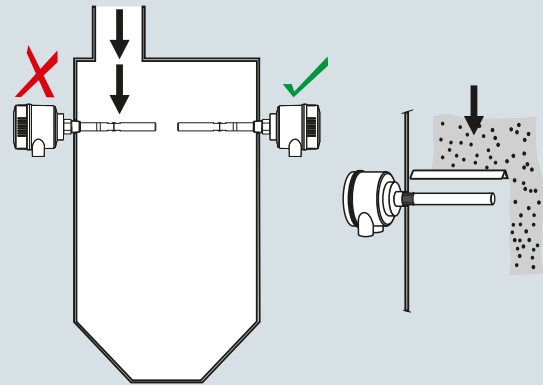

Keep unit out of path of falling material, or protect probe from falling material.

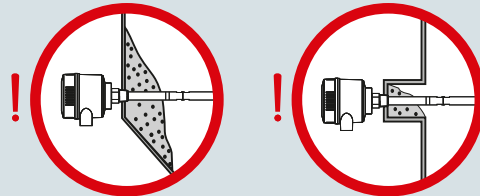

Build up of material in active shield area does not affect switch operation.

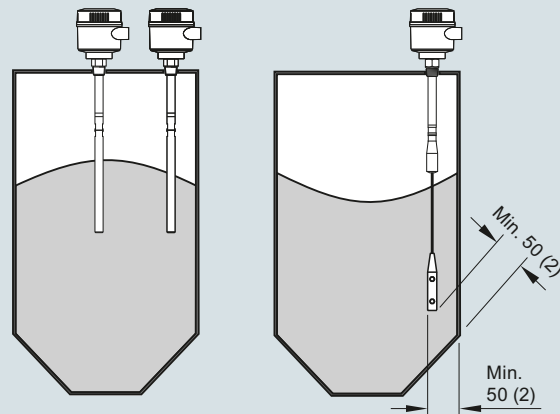

Install probe at least 50 (2) from tank wall.  
Note angle of repose and adjust accordingly.

Pointek CLS300 installation, dimensions in mm (inch)

# Level measurement

## Point level measurement

### RF Capacitance switches

#### Pointek CLS300 - Standard

#### Technical specifications

Mode of operation		Design	
Measuring principle	Inverse frequency shift capacitive level detection	Material (enclosure)	Powder-coated aluminum with gasket
<b>Input</b>		Degree of Protection	Standard: Type 4/NEMA 4/IP65 Optional: Type 4/NEMA 4/IP68
Measured variable	Change in picoFarad (pF)	Cable inlet	2 x M20 x 1.5 thread (option: 2 x 1/2" NPT conduit entry including 1 plugged entry)
<b>Output</b>		<b>Controls and displays</b>	
Output signal		Displays	3 LEDs, for probe status, output status and power supply
• Relay output	1 SPDT Form C relay	Potentiometers	2 potentiometers for time delay and sensitivity
- Max. contact voltage	• 30 V DC • 250 V AC	Switches	5 DIP switches for delay on/off, fail-safe high/low, time delay test/adjust, high/low sensitivity, test delay settings
- Max. contact current	• 5 A (DC) • 8 A (AC)	<b>Power supply</b>	
- Max. switching capacity	• 150 W (DC) • 2 000 VA (AC)	Supply	12 ... 250 V AC/DC, 0 ... 60 Hz, galvanically isolated, 2 W
- Time delay (ON and/or OFF)	1 ... 60 s	<b>Certificates and approvals</b>	
• Solid-state output		General Purpose	CSA, FM, CE, RCM
- Output	Galvanically isolated	Flameproof Enclosure with IS Probe	ATEX II 1/2 G EEx d[ia] IIC T6 ... T1 ATEX II 1/2 D T100 °C
- Protection	Against reversed polarity (bipolar)	Dust Ignition Proof with IS Probe	ATEX II 1/2 D T100 °C CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
- Max. switching voltage	• 30 V (DC) • 30 V peak (AC)	Explosion Proof Enclosure with IS Probe	CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
- Max. load current	82 mA	Marine	Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
- Voltage drop	< 1 V, typical at 50 mA	Overfill Protection	WHG (Germany) VLAREM II (Belgium)
- Time delay (pre or post switching)	1 ... 60 s	Others	Pattern Approval (China)
<b>Accuracy</b>		<sup>1)</sup> When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves starting on page 5/57. <sup>2)</sup> Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F). <sup>3)</sup> Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves starting on page 5/57.	
Resolution			
• Min. sensitivity (pF)	1 % change in actual capacitance		
• Max. temperature error	0.2 % of actual capacitance value		
<b>Rated operating conditions<sup>1)</sup></b>			
Installation conditions			
• Location	Indoor/outdoor		
Ambient conditions			
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup>		
• Storage temperature	-40 ... +85 °C (-40 ... +185 °F)		
Medium conditions			
	Liquids, bulk solids, slurries and interfaces, and applications with viscous materials		
• Relative dielectric constant $\epsilon_r$	Min. 1.5		
• Process temperature			
- Rod/Cable version	-40 ... +200 °C (-40 ... +392 °F) <sup>2)</sup>		
- High-temperature version	-40 ... +400 °C (-40 ... +752 °F)		
• Process pressure <sup>3)</sup>	-1 ... +35 bar g (-14.6 ... +511 psi g)		

Design: Probe	Rod version	High Temperature version	Cable version
Length	Min. 250 mm (9.8 inch), max. 1 000 mm (40 inch)	Min. 250 mm (9.8 inch), max. 1 000 mm (40 inch)	Min. 1 000 mm (40 inch), max. 25 000 mm (984 inch)
Sensor wetted parts	PFA (no insulation on active probe), 316L stainless steel, PEEK isolators	Ceramic (ZrO <sub>2</sub> <sup>1)</sup> isolators (no insulation on active probe), 316L stainless steel	316 stainless steel, optional PFA, PEEK isolators
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	Graphite <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator	Optional	Standard	Optional
Extension	User selectable length	User selectable length	User selectable cable length

<sup>1)</sup> Zirconium Oxide

<sup>2)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit <http://www.usa.siemens.com/level>.


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS300 - Standard


#### Characteristic curves

**Pressure/temperature curve**  
**CLS300 extended rod and cable probes**  
**Threaded process connections**  
**(7ML5650, 7ML5651, 7ML5660 and 7ML5661)**

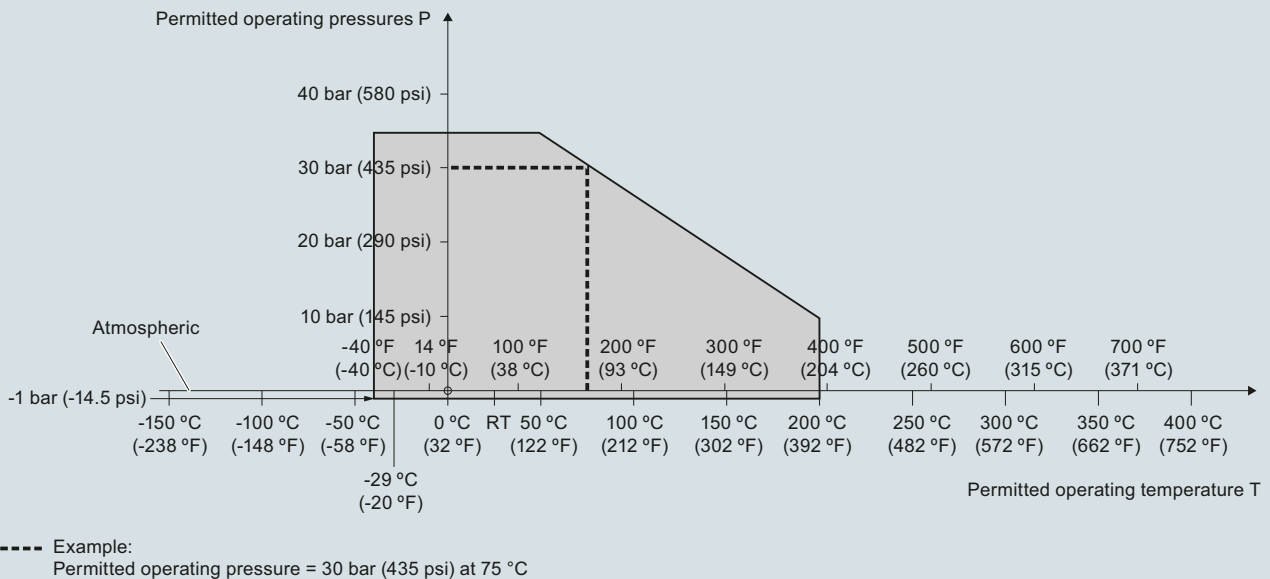

Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660, and 7ML5661)


**Pressure/temperature curve**  
**CLS300 high temperature rod probes**  
**Threaded process connections**  
**(7ML5652 and 7ML5662)**

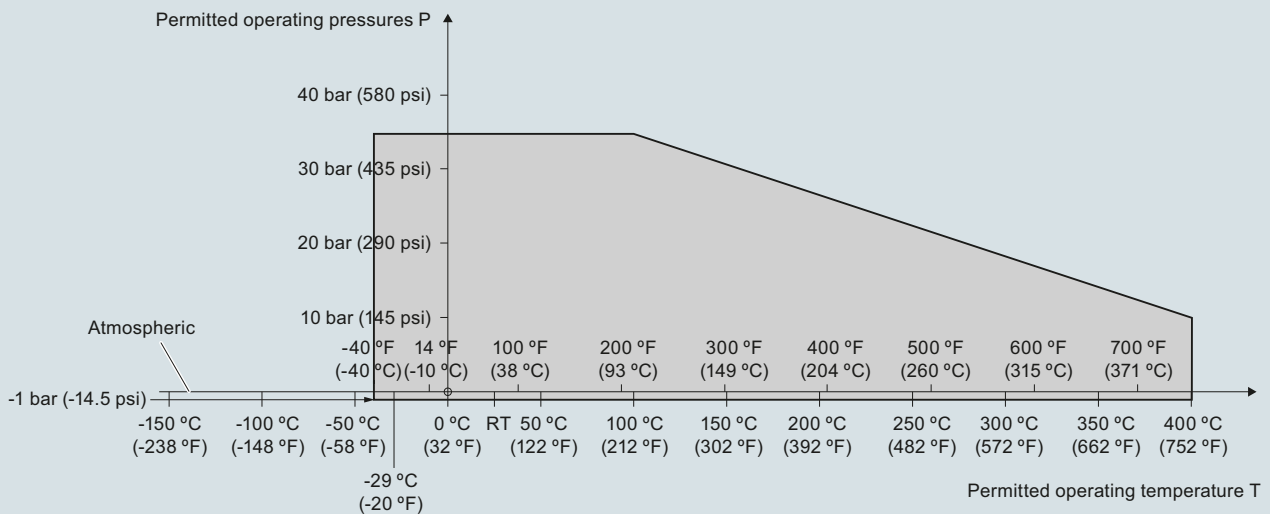

Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)

**Characteristic curves** (continued)

**Pressure/temperature curve**  
CLS300 extended rod and cable probes  
ASME flanged process connections  
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

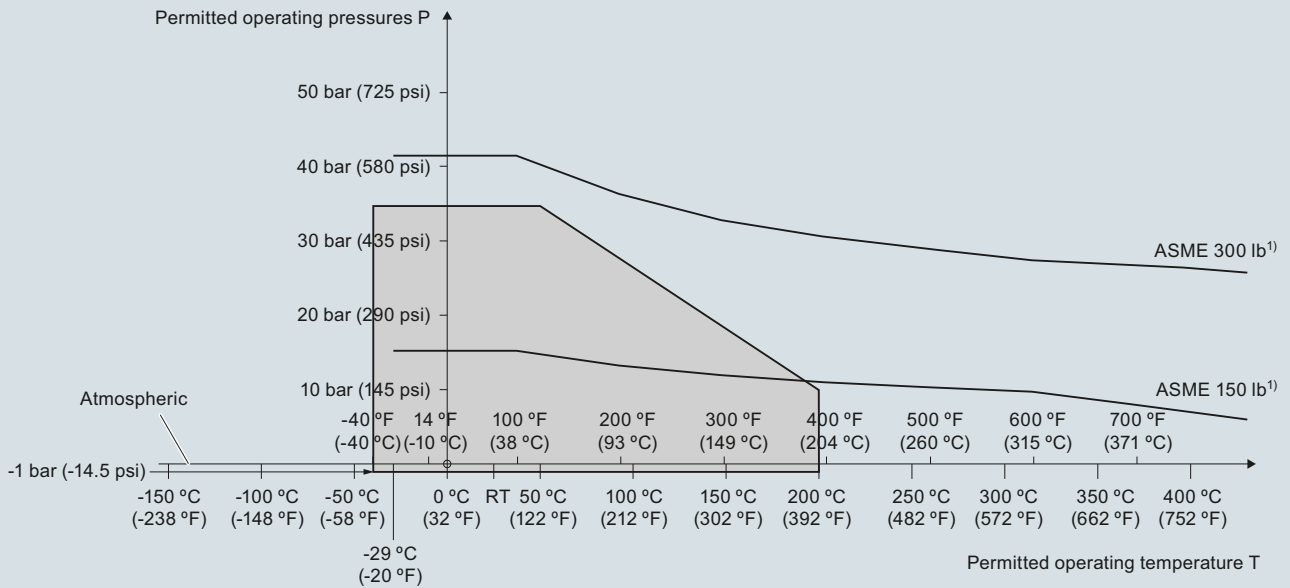

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660, and 7ML5661)

## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS300 - Standard

#### Characteristic curves (continued)

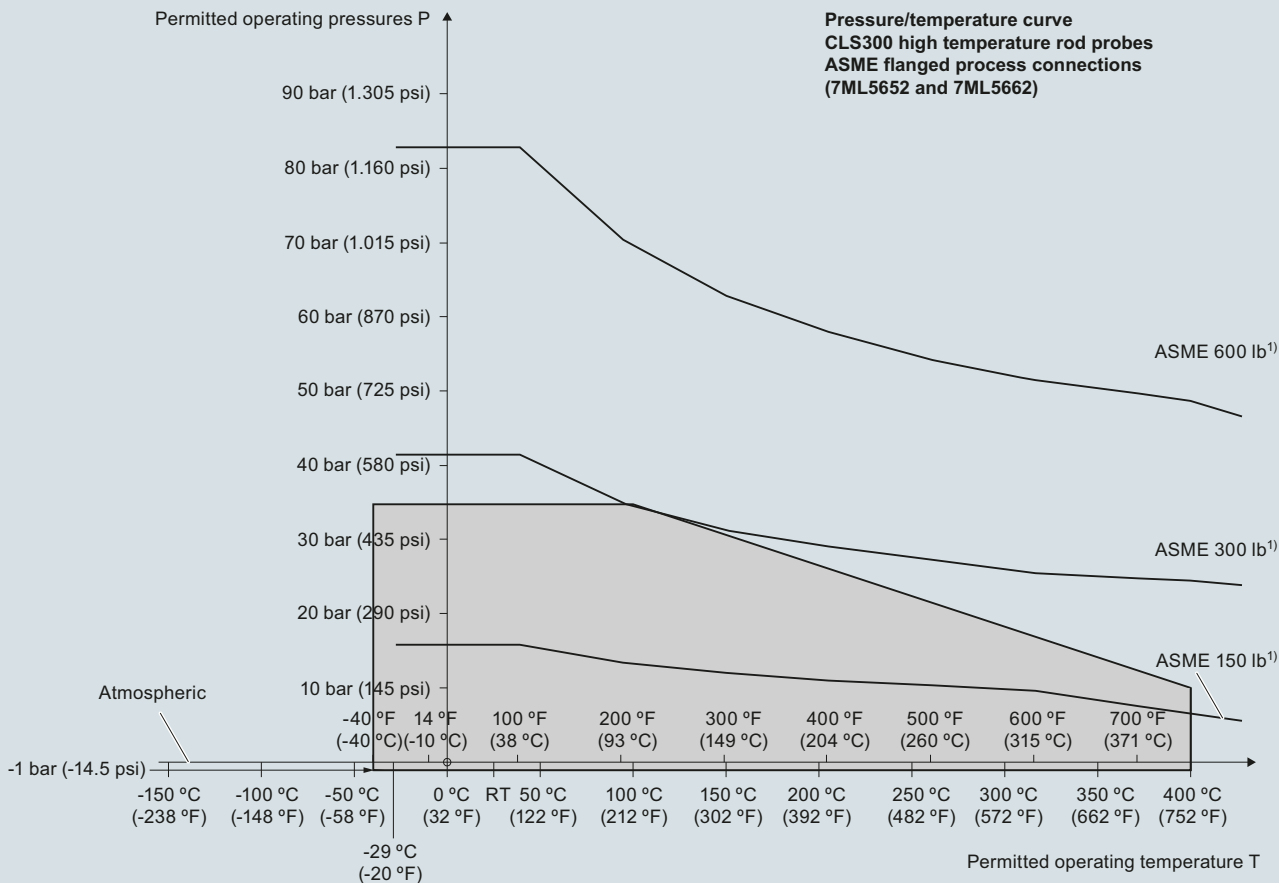


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)



**Characteristic curves (continued)**


**Pressure/temperature curve**  
CLS300 extended rod and cable probes  
EN flanged process connections  
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

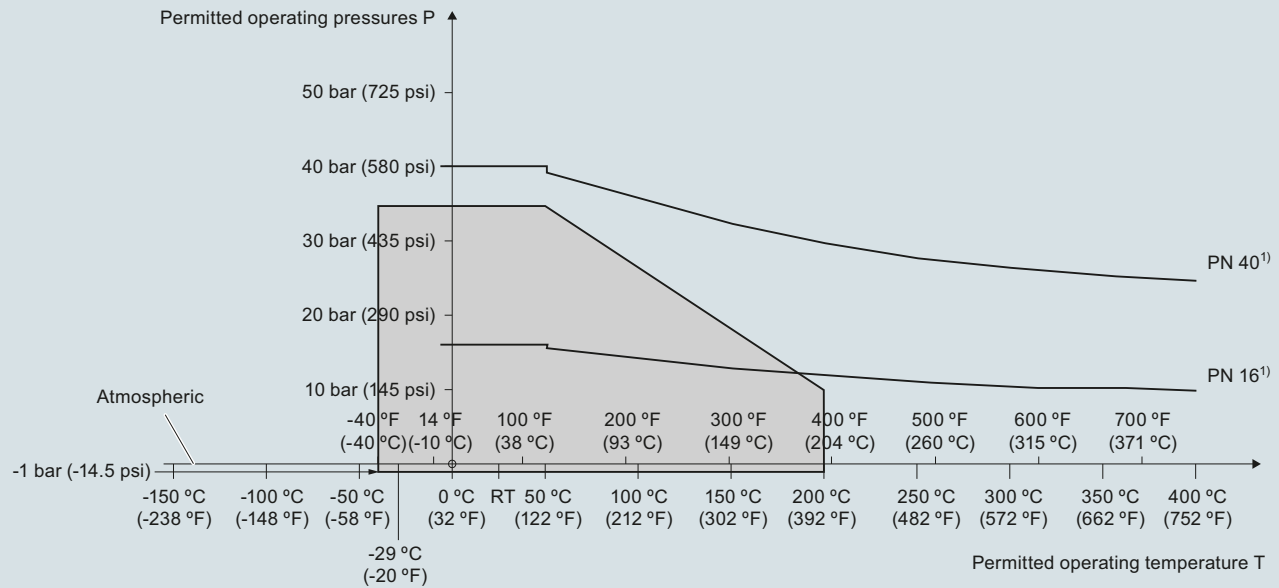

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660, and 7ML5661)

**Pressure/Temperature Curve**  
CLS300 High Temperature Rod Probes  
EN Flanged Process Connections (7ML5652 and 7ML5662)

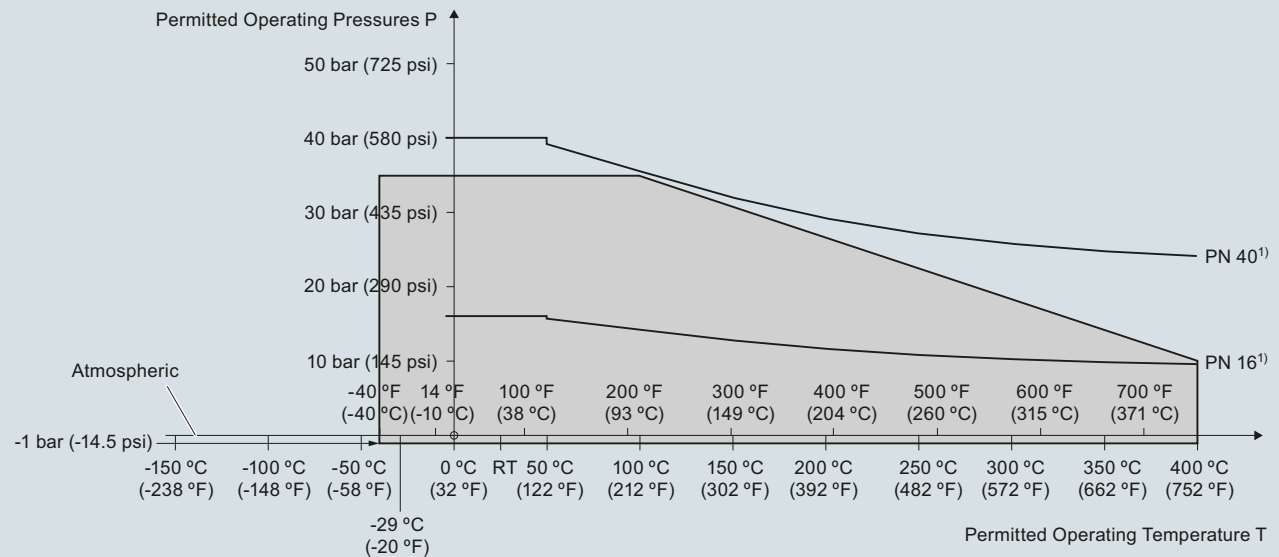

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)


# Level measurement

Point level measurement  
RF Capacitance switches



## Pointek CLS300 - Standard

### Dimensional drawings


**Rod version  
Threaded (7ML5650 and 7ML5660)**

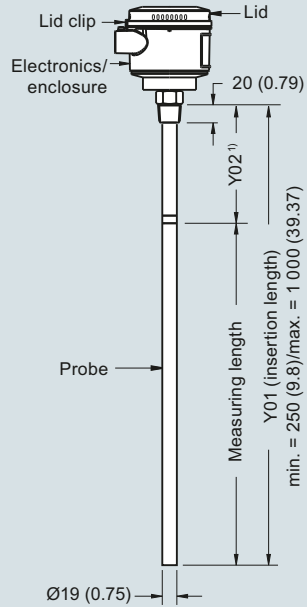


**High temperature rod version  
Threaded (7ML5652 and 7ML5662)**

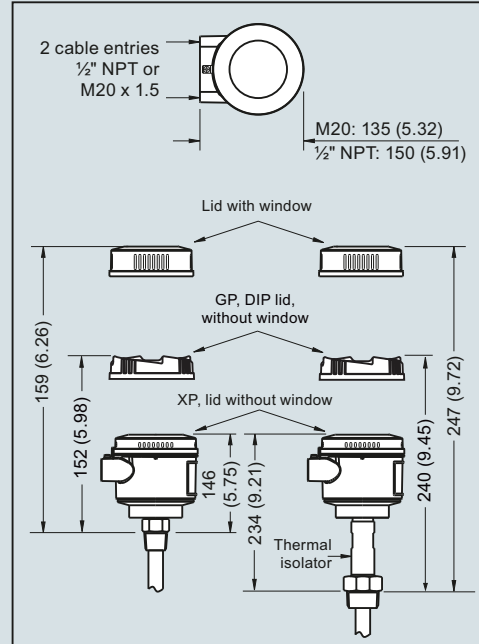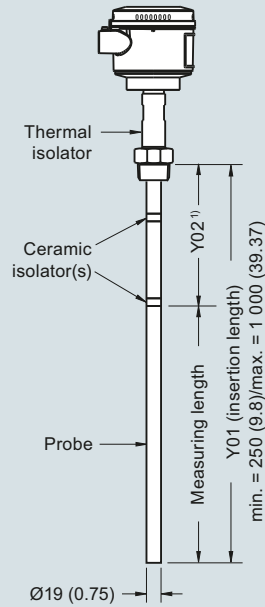

**Cable version, non-insulated  
Threaded (7ML5651 and 7ML5661)**

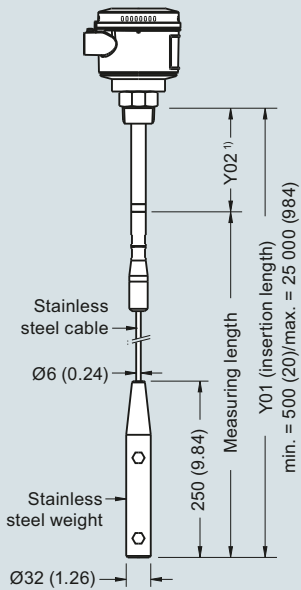

**Cable version, insulated  
Threaded (7ML5651 and 7ML5661)**

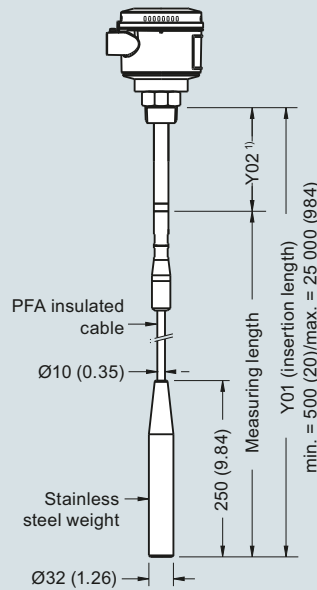

**Note:**


<sup>1)</sup> Extended Active Shield (Y02): standard length 125 (4.92). Optional active shield lengths: 250 (9.84) or 400 (15.75).

Pointek CLS300 threaded process connections, dimensions in mm (inch)



4

**Dimensional drawings** (continued)


**Rod version  
Welded flange (7ML5650 and 7ML5660)**

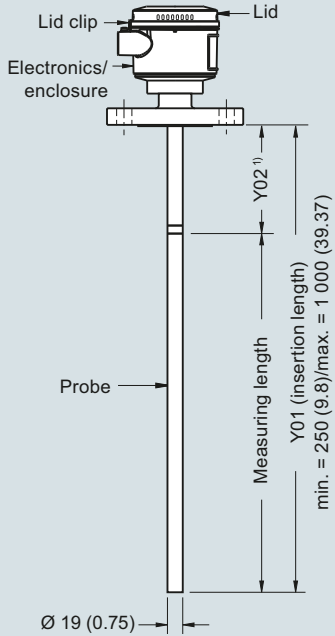


**High temperature rod version  
Welded flange (7ML5652 and 7ML5662)**

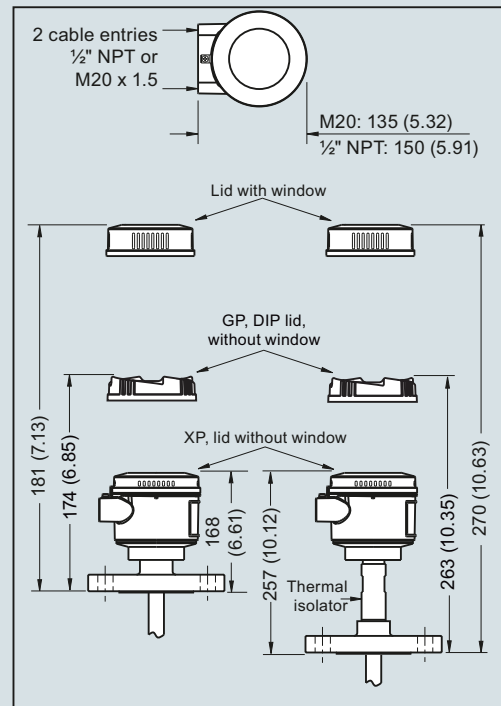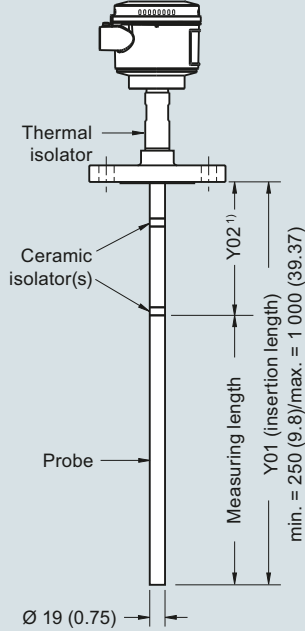

**Cable version, non-insulated  
Welded flange (7ML5651 and 7ML5661)**

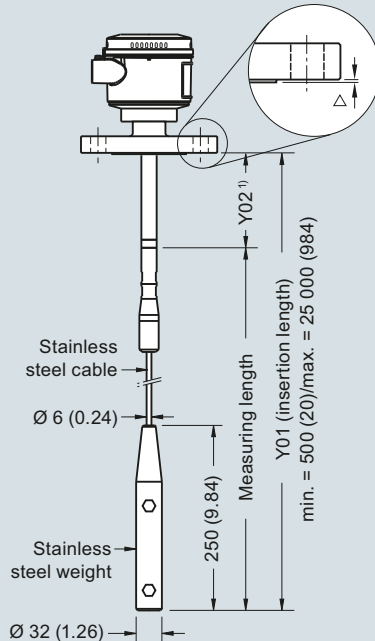

**Cable version, insulated  
Welded flange (7ML5651 and 7ML5661)**

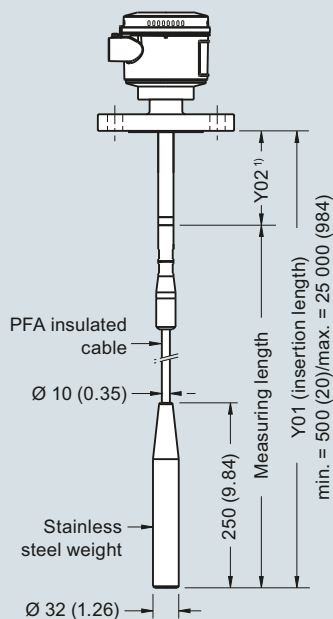

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

**Note:**

<sup>1)</sup> Extended Active Shield (Y02): standard length 105 (4.13). Optional active shield lengths: 230 (9.06) or 380 (14.96). Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)

Pointek CLS300 flanged process connections, dimensions in mm (inch)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS300 - Standard

#### Circuit diagrams


##### Wiring: Pointek CLS300 standard

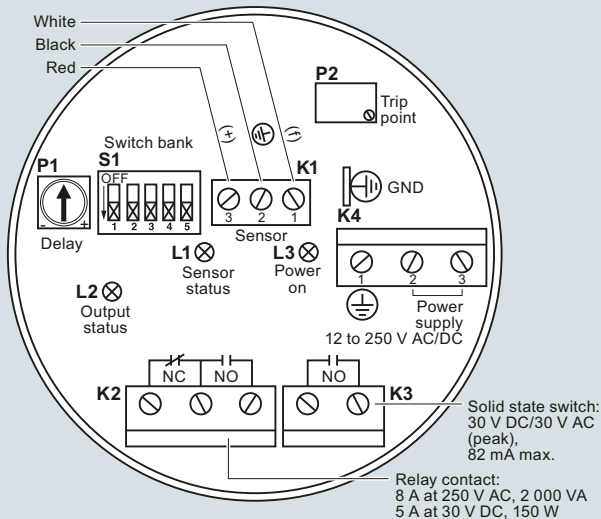

**Notes:**

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction manual or contact Siemens representative for detailed wiring information.

##### Wiring: Pointek CLS300 digital

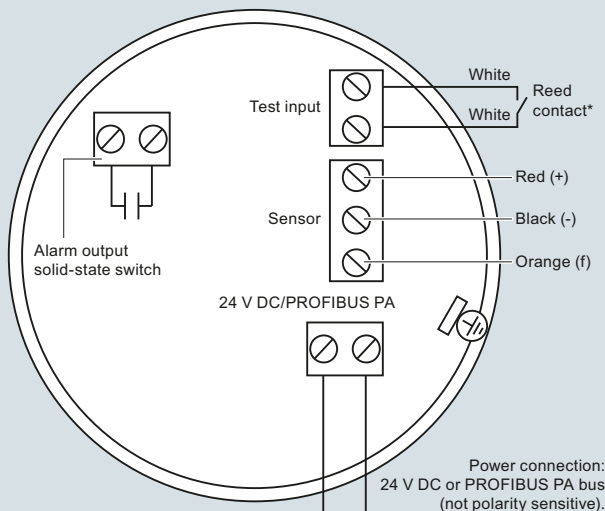

**Notes:**

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

**\*Magnet activated sensor test**

A magnet can be used to test the sensor without opening the lid of the Pointek CLS300 digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS300 connections

## Overview



Pointek CLS300 (digital version) is an inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. It is ideal for detecting liquids, solids, slurries, foam, and interfaces in demanding conditions where high pressure and temperatures are present and has the ability to tune out buildup on the probe. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

## Benefits

- Active-Shield technology so measurement is unaffected by material buildup or nozzle interference in active shield section
- Performs in extremely abrasive conditions because of solid rod construction
- Push-button calibration, full-function diagnostics
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

## Application

Pointek CLS300 digital version provides an integral LCD display for stand-alone use, with PROFIBUS PA communication (Profile version 3.0, Class B) when required. Solid-state switch alarm is standard.

The robust design of CLS300 makes it specifically applicable for heavy solids applications where abrasive materials occur as in the mining industry.

The fully potted electronics are unaffected by condensation, dust or vibration.


Wetted parts are made of stainless steel with a PFA shield for high chemical resistance, and of ceramic and stainless steel for high temperature version. Materials with low or high dielectric constants can be accurately detected. The unique Active Shield suppresses interference from material buildup or long installation nozzles.

The unique modular design of the Pointek CLS300 provides a wide range of configurations, process connections, extensions and approvals to meet the temperature and pressure requirements of specific applications. The modular design makes ordering easier and reduces stocking requirements. A wide range of probe configurations are available, including rod and cable versions.


- Key Applications: liquids, slurries, bulk solids, relatively high pressure and temperature, hazardous areas, milling and mining applications

## Configuration


### Installation

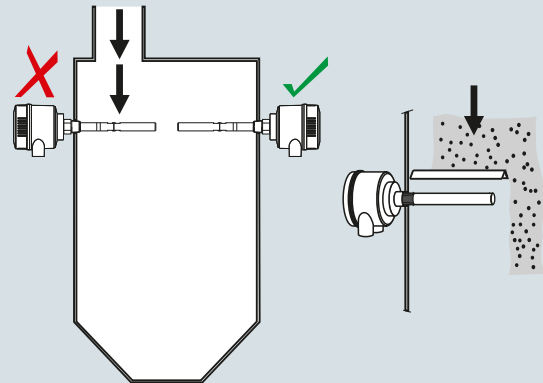

Keep unit out of path of falling material, or protect probe from falling material.

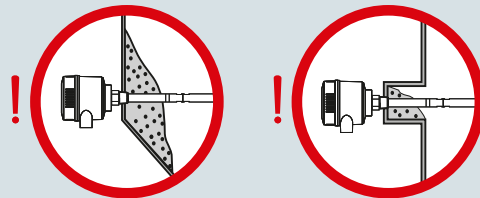

Build up of material in active shield area does not affect switch operation.

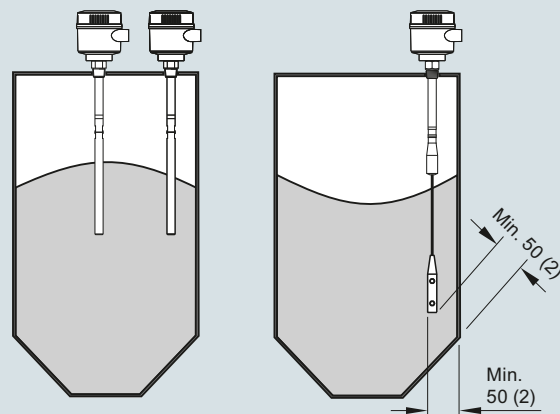

Install probe at least 50 (2) from tank wall.  
Note angle of repose and adjust accordingly.

Pointek CLS300 installation, dimensions in mm (inch)

## Level measurement

### Point level measurement

### RF Capacitance switches

#### Pointek CLS300 - Digital

#### Technical specifications

<b>Mode of operation</b>		<b>Power supply</b>	
Measuring principle	Inverse frequency shift capacitive level detection	Bus voltage (at process connection)	<ul style="list-style-type: none"> <li>Standard: 12 ... 30 V DC</li> <li>Intrinsically Safe: 12 ... 24 V DC</li> </ul>
<b>Input</b>		Current consumption	12.5 mA
Measured variable	Change in picoFarad (pF)	<b>Certificates and approvals</b>	
<b>Output</b>		General Purpose	CSA, FM, CE, RCM
Solid-state output		Dust Ignition Proof	ATEX II 1/2 D, 2 D IP6X T100 °C
<ul style="list-style-type: none"> <li>Output</li> <li>Protection</li> <li>Max. switching voltage</li> </ul>	Galvanically isolated Against reversed polarity (bipolar) <ul style="list-style-type: none"> <li>30 V (DC)</li> <li>30 V peak (AC)</li> </ul>	Flameproof Enclosure With IS Probe	ATEX II 1/2 G EEx d[ia] IIC T6 ... T4 ATEX II 1/2 D T100 °C
<ul style="list-style-type: none"> <li>Max. load current</li> <li>Voltage drop</li> <li>Time delay (pre or post switching)</li> </ul>	82 mA < 1 V, typical at 50 mA Programmable by user (0 ... 100 s)	Dust Ignition Proof With IS Probe	CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Fail-safe mode	Min. or max.	Intrinsically Safe <sup>4)</sup>	ATEX II 1 G EEx ia IIC T6 ... T4 ATEX II 1/2 D, 2 D IP6X T100 °C
Connection	Removable terminal block		CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
<b>Accuracy</b>		Non-incendive	CSA/FM Class I, Div. 2, Groups A, B, C, D CSA/FM Class II, Div. 2, Groups F, G CSA/FM Class III T4 or T6
Resolution		Explosion Proof with IS Probe	CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
<ul style="list-style-type: none"> <li>Min. sensitivity (pF)</li> <li>Max. temperature error</li> </ul>	1 % change in actual capacitance 0.2 % of actual capacitance value	Marine	Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
<b>Rated operating conditions<sup>1)</sup></b>		Others	Pattern Approval (China)
Installation conditions		<b>Communication</b>	
<ul style="list-style-type: none"> <li>Location</li> </ul>	Indoor/outdoor	PROFIBUS PA (IEC 61158 CPF3 CP3/2)	
Ambient conditions		Bus physical layer: IEC 61158-2 MBP-(IS)	
<ul style="list-style-type: none"> <li>Ambient temperature</li> <li>Storage temperature</li> </ul>	-40 ... +85 °C (-40 ... +185 °F) <sup>2)</sup> -40 ... +85 °C (-40 ... +185 °F)	Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B	
Medium conditions		FISCO field device	
<ul style="list-style-type: none"> <li>Relative dielectric constant <math>\epsilon_r</math></li> <li>Process temperature</li> </ul>	Liquids, bulk solids, slurries, interfaces, and applications with viscous materials Min. 1.5		
<ul style="list-style-type: none"> <li>Rod/Cable version</li> <li>High Temperature version</li> </ul>	-40 ... +200 °C (-40 ... +392 °F) <sup>2)</sup> -40 ... +400 °C (-40 ... +752 °F)		
<ul style="list-style-type: none"> <li>Process pressure<sup>3)</sup></li> </ul>	-1 ... +35 bar g (-14.6 ... +511 psi g)		
<b>Design</b>			
Material (enclosure)	Powder-coated aluminum with gasket		
Degree of protection	Standard: Type 4/NEMA 4/IP65 Optional: Type 4/NEMA 4/IP68		
Cable inlet	2 x M20 x 1.5 thread (option: 2 x 1/2" NPT conduit entry including 1 plugged entry)		
<b>Controls and displays</b>			
Local display	LCD		
Configuration	<ul style="list-style-type: none"> <li>Locally, using 3 button keypad (for standalone operation)</li> <li>Remotely, using SIMATIC PDM (for installation on a network)</li> </ul>		

- When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves starting on page 5/57.
- Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)
- Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves starting on page 5/57.
- Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection

#### Design: Probe


	Rod version	High Temperature version	Cable version
Length	Min. 250 mm (9.8 inch), max. 1 000 mm (40 inch)	Min. 250 mm (9.8 inch), max. 1 000 mm (40 inch)	Min. 1 000 mm (40 inch), max. 25 000 mm (984 inch)
Sensor wetted parts	PFA (no insulation on active probe), 316L stainless steel, PEEK isolators	Ceramic (ZrO <sub>2</sub> <sup>1)</sup> isolators (no insulation on active probe), 316L stainless steel	316 stainless steel, optional PFA, PEEK isolators
O-ring seal material	FKM (optional FFKM) <sup>2)</sup>	Graphite <sup>2)</sup>	FKM (optional FFKM) <sup>2)</sup>
Thermal isolator	Optional	Standard	Optional
Extension	User selectable length	User selectable length	User selectable cable length

<sup>1)</sup> Zirconium Oxide

<sup>2)</sup> For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit <http://www.usa.siemens.com/level>.


**Characteristic curves**

**Pressure/temperature curve**  
**CLS300 extended rod and cable probes**  
**Threaded process connections**  
**(7ML5650, 7ML5651, 7ML5660 and 7ML5661)**

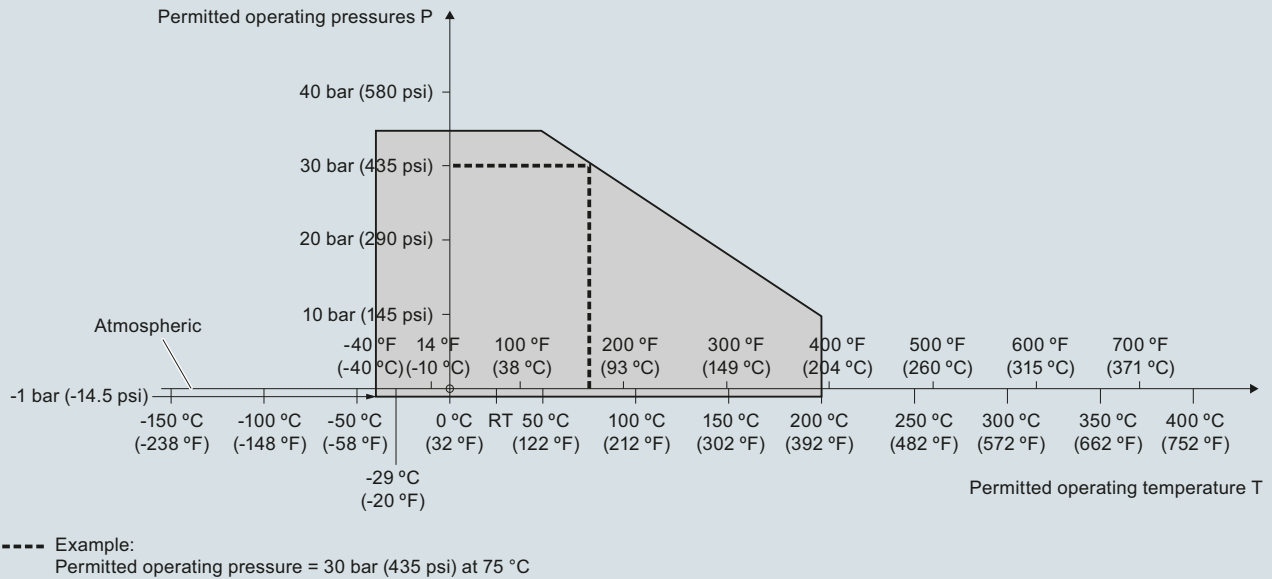

Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660 and 7ML5661)

**Pressure/temperature curve**  
**CLS300 high temperature rod probes**  
**Threaded process connections**  
**(7ML5652 and 7ML5662)**

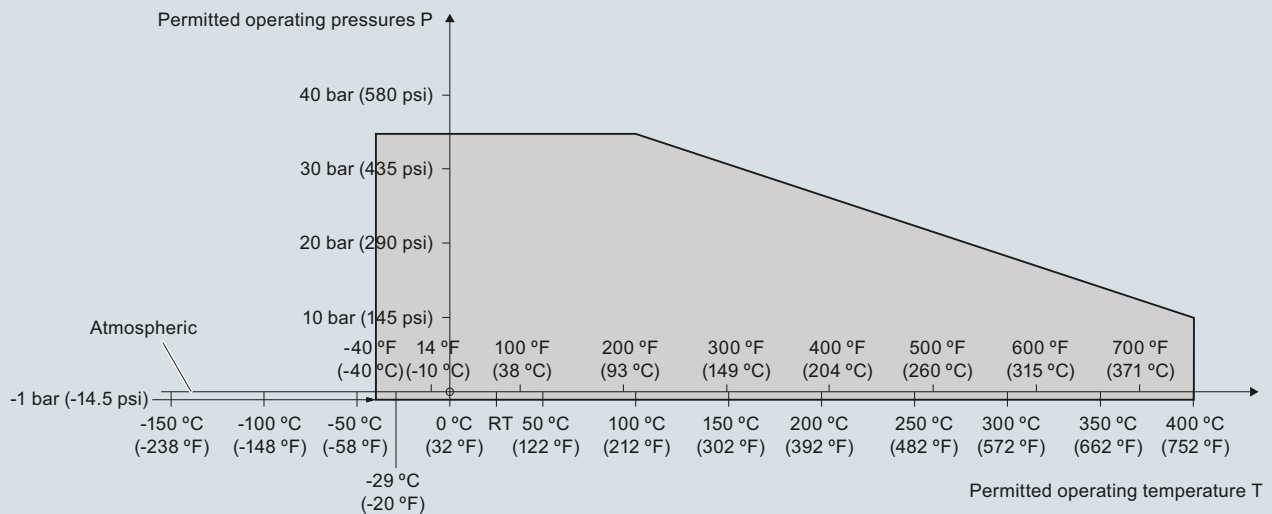

Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS300 - Digital

#### Characteristic curves (continued)

**Pressure/temperature curve**  
CLS300 extended rod and cable probes  
ASME flanged process connections  
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

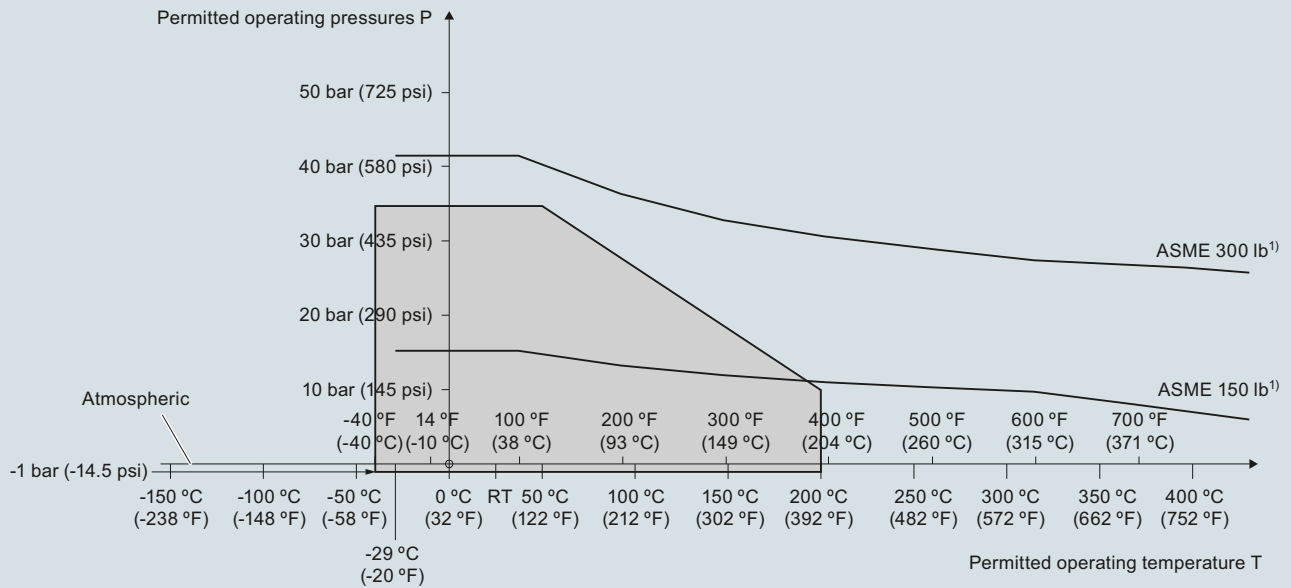


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660, and 7ML5661)



**Characteristic curves** (continued)

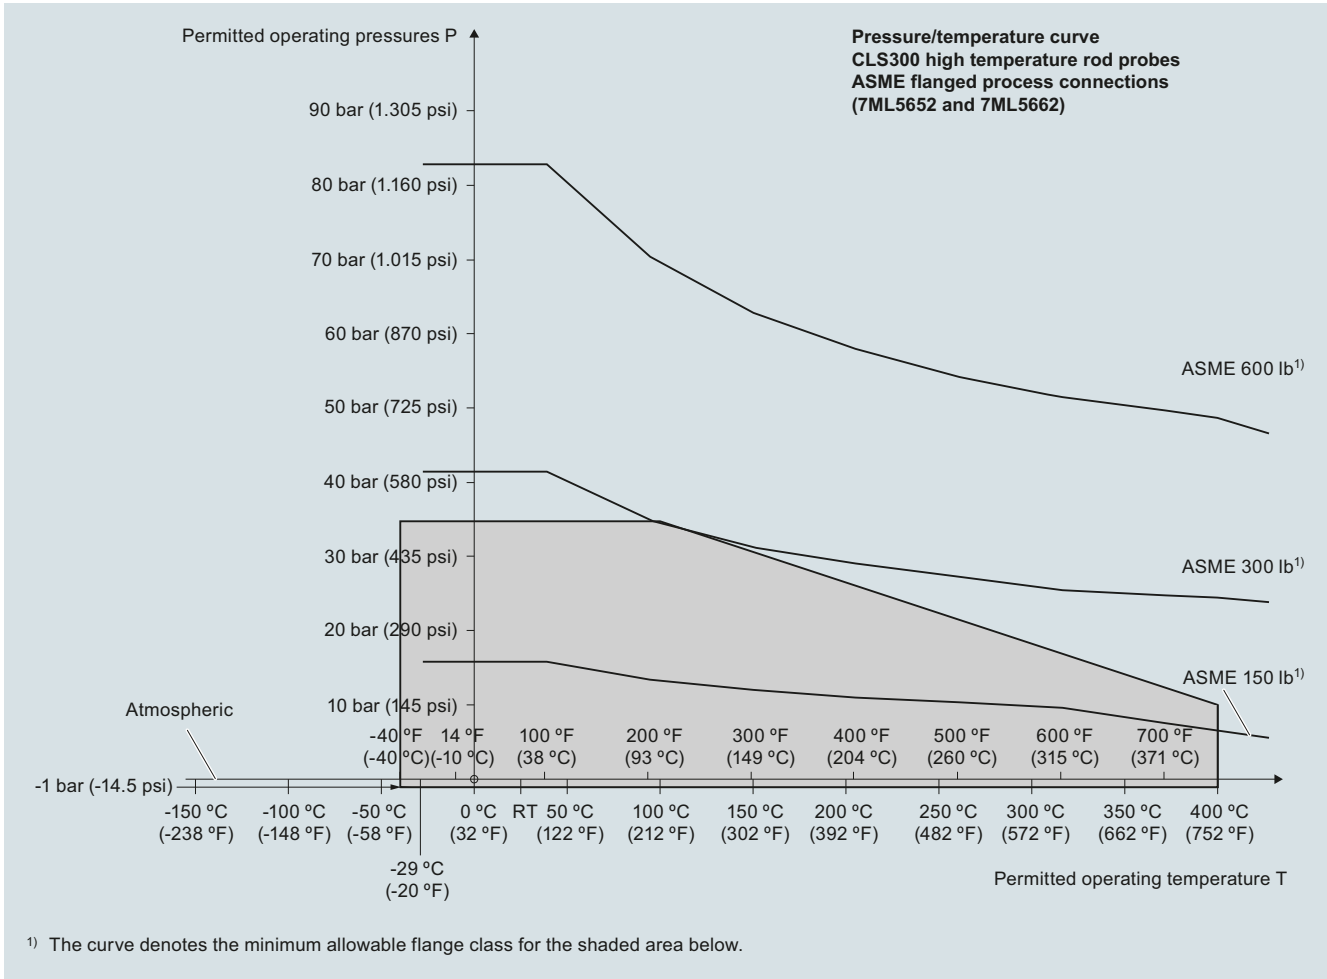

Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)


## Level measurement

Point level measurement  
RF Capacitance switches

### Pointek CLS300 - Digital

#### Characteristic curves (continued)


**Pressure/temperature curve**  
CLS300 extended rod and cable probes  
EN flanged process connections  
(7ML5650, 7ML5651, 7ML5660 and 7ML5661)

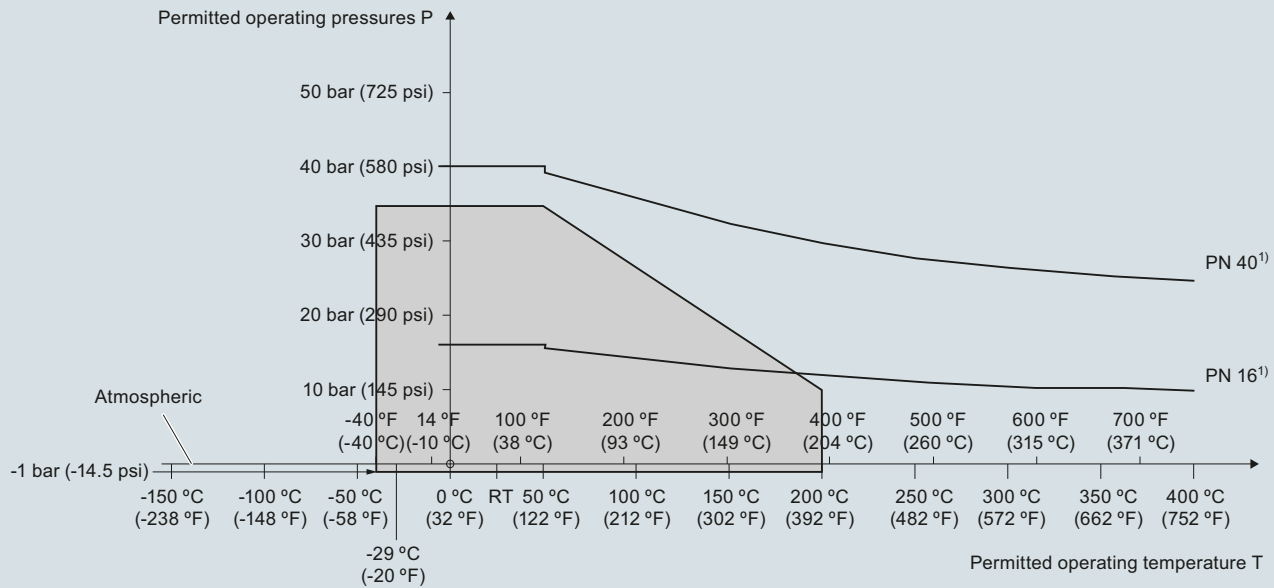

<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS300 process pressure/temperature derating curves (7ML5650, 7ML5651, 7ML5660 and 7ML5661)

**Pressure/Temperature Curve**  
CLS300 High Temperature Rod Probes  
EN Flanged Process Connections (7ML5652 and 7ML5662)

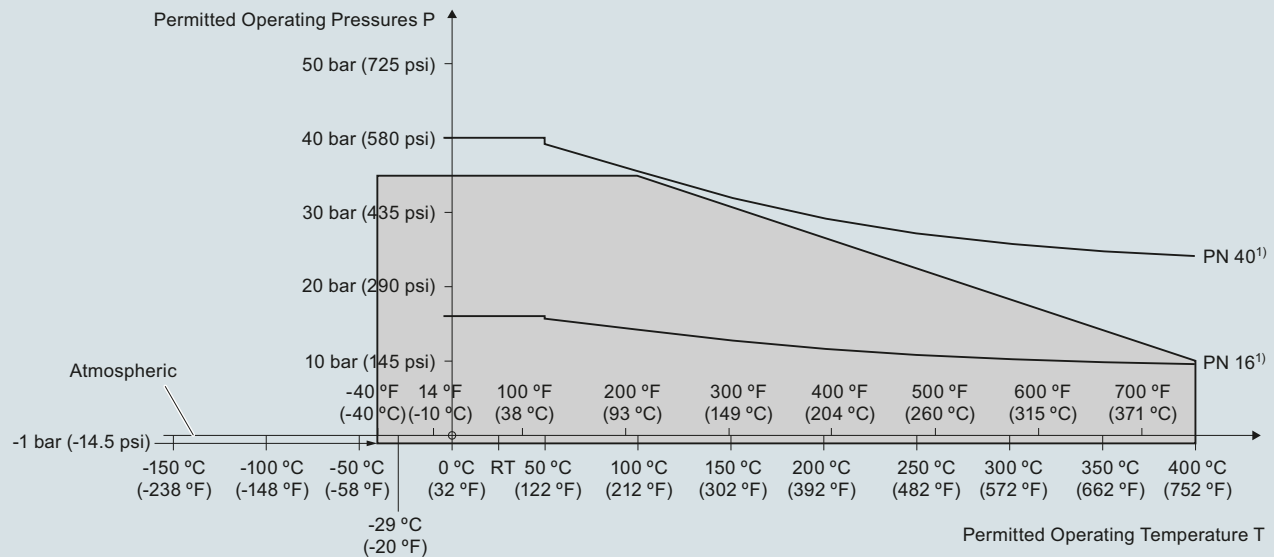


<sup>1)</sup> The curve denotes the minimum allowable flange class for the shaded area below.



Pointek CLS300 process pressure/temperature derating curves (7ML5652 and 7ML5662)

**Dimensional drawings**


**Rod version  
Threaded (7ML5650 and 7ML5660)**

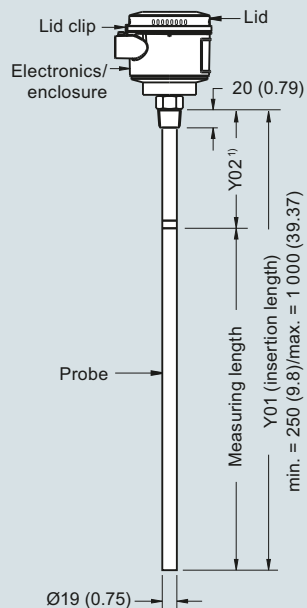


**High temperature rod version  
Threaded (7ML5652 and 7ML5662)**

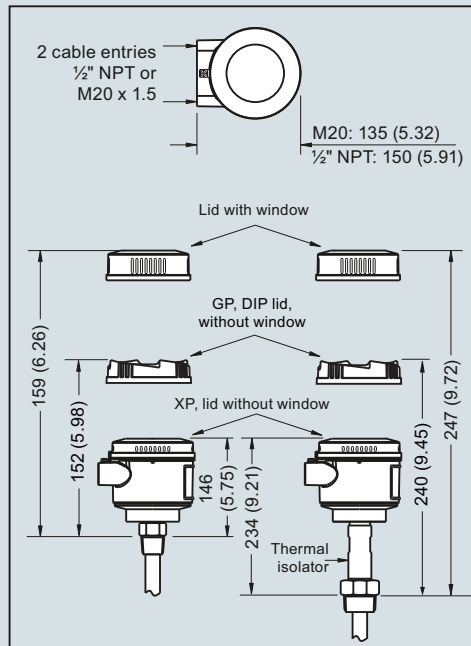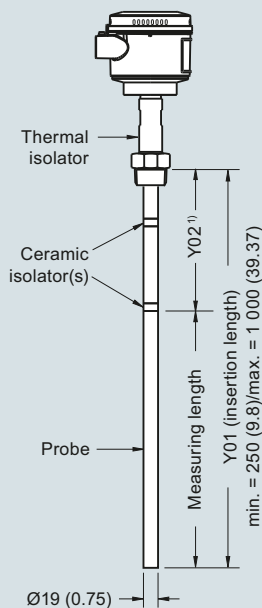

**Cable version, non-insulated  
Threaded (7ML5651 and 7ML5661)**

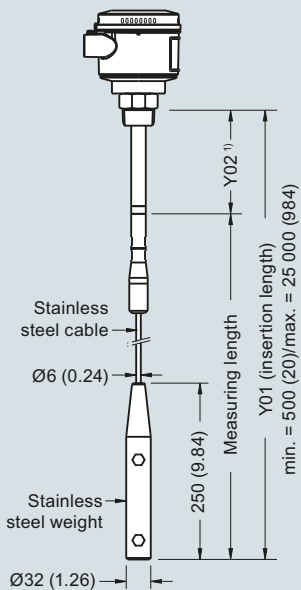

**Cable version, insulated  
Threaded (7ML5651 and 7ML5661)**

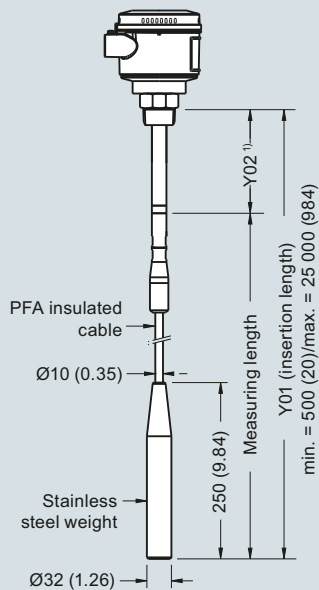

**Note:**

<sup>1)</sup> Extended Active Shield (Y02): standard length 125 (4.92). Optional active shield lengths: 250 (9.84) or 400 (15.75).

Pointek CLS300 threaded process connections, dimensions in mm (inch)

# Level measurement


Point level measurement  
RF Capacitance switches

## Pointek CLS300 - Digital



### Dimensional drawings (continued)

4


**Rod version  
Welded flange (7ML5650 and 7ML5660)**

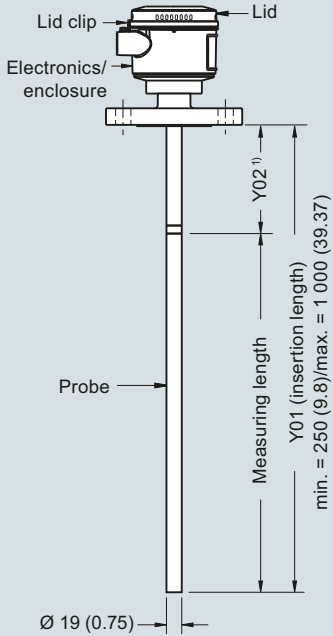


**High temperature rod version  
Welded flange (7ML5652 and 7ML5662)**

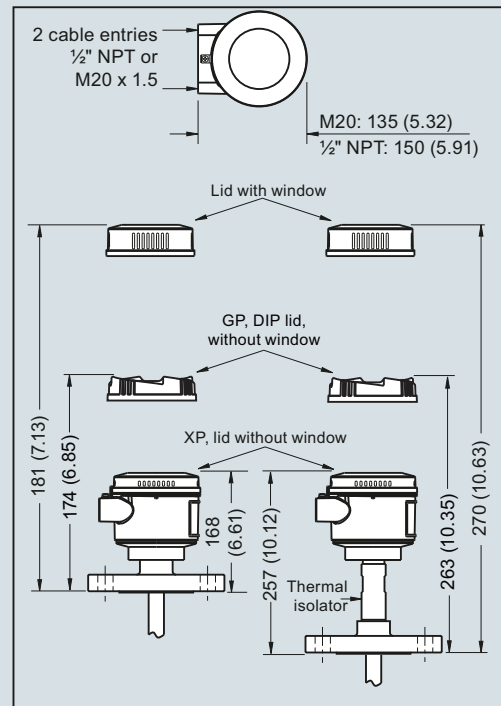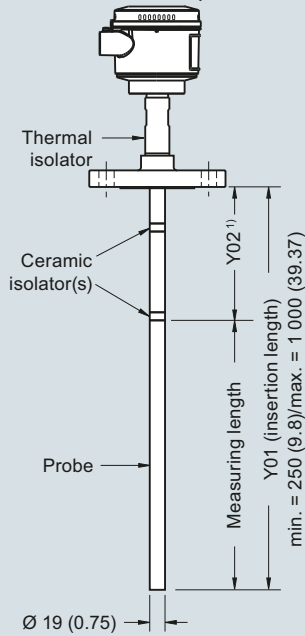

**Cable version, non-insulated  
Welded flange (7ML5651 and 7ML5661)**

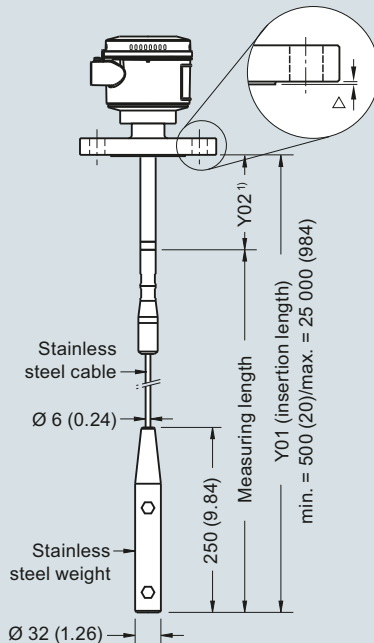

**Cable version, insulated  
Welded flange (7ML5651 and 7ML5661)**

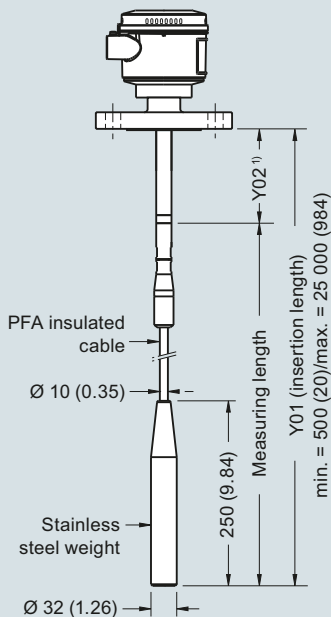

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)


**Note:**

<sup>1)</sup> Extended Active Shield (Y02): standard length 105 (4.13). Optional active shield lengths: 230 (9.06) or 380 (14.96).  
Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)

Pointek CLS300 flanged process connections, dimensions in mm (inch)

**Circuit diagrams**


**Wiring: Pointek CLS300 standard**

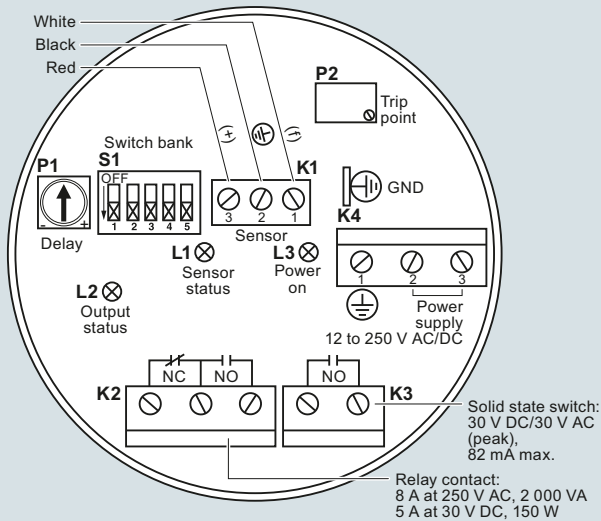

**Notes:**

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction manual or contact Siemens representative for detailed wiring information.

**Wiring: Pointek CLS300 digital**

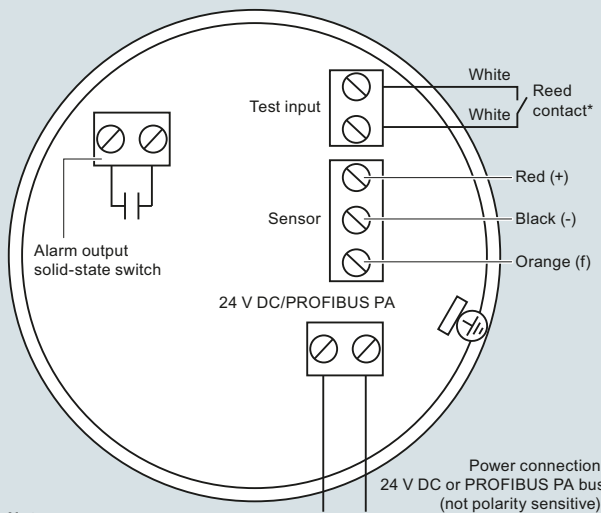

**Notes:**

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

**\*Magnet activated sensor test**

A magnet can be used to test the sensor without opening the lid of the Pointek CLS300 digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS300 connections